


## User manual of Patrol V6.0

### I . Software instruction

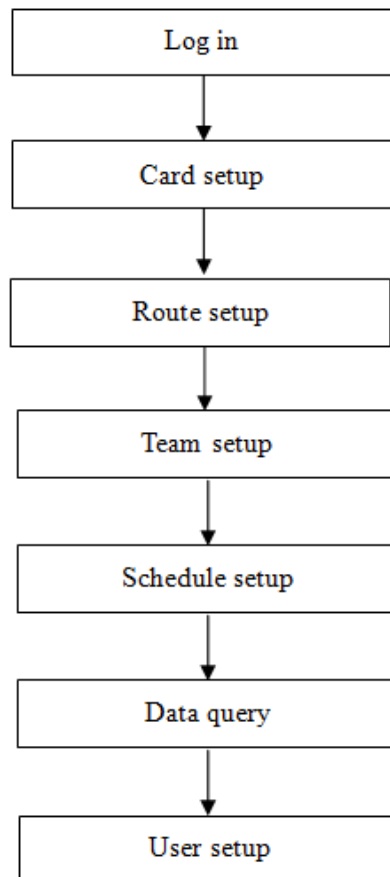

|                                                                                               |           |
|-----------------------------------------------------------------------------------------------|-----------|
| <b>I . SOFTWARE INSTRUCTION .....</b>                                                         | <b>1</b>  |
| <b>II . ATTENTION .....</b>                                                                   | <b>3</b>  |
| <b>III. SOFTWARE OPERATION.....</b>                                                           | <b>3</b>  |
| <b>1. LOG IN .....</b>                                                                        | <b>3</b>  |
| <b>2. NEW USER .....</b>                                                                      | <b>4</b>  |
| <b>3. LOGO TITLE.....</b>                                                                     | <b>9</b>  |
| <b>4. NAVIGATION BAR.....</b>                                                                 | <b>10</b> |
| <b>5. HOME PAGE DISPLAY .....</b>                                                             | <b>10</b> |
| <b>6. DATA COMMUNICATION .....</b>                                                            | <b>11</b> |
| <b>7. REPORT .....</b>                                                                        | <b>15</b> |
| <b>8. GENERAL SETUP .....</b>                                                                 | <b>16</b> |
| <i>8.1 .Card setup.....</i>                                                                   | <i>16</i> |
| <i>8.2. Team setup .....</i>                                                                  | <i>22</i> |
| <i>8.3. Route setup.....</i>                                                                  | <i>24</i> |
| <i>8.4. Device setup.....</i>                                                                 | <i>30</i> |
| <i>8.5. Schedule setup.....</i>                                                               | <i>30</i> |
| <b>9. REPORT.....</b>                                                                         | <b>36</b> |
| <i>9.1. Raw data.....</i>                                                                     | <i>36</i> |
| <i>9.2. Data result (This report is for the patrol route with is set with schedule) .....</i> | <i>38</i> |
| <i>9.3. Data count (This report if for non-scheduled data )......</i>                         | <i>43</i> |
| <i>9.4 Data Analysis .....</i>                                                                | <i>47</i> |
| <i>9.5 Impact record .....</i>                                                                | <i>48</i> |
| <i>9.6     Data count report .....</i>                                                        | <i>49</i> |
| <i>9.7     Auto-email     .....</i>                                                           | <i>51</i> |
| <b>10. SYSTEM TOOLS .....</b>                                                                 | <b>57</b> |
| <i>10.1 User setup.....</i>                                                                   | <i>57</i> |
| <i>10.2 System resetting .....</i>                                                            | <i>61</i> |
| <i>10.3. Company information .....</i>                                                        | <i>62</i> |
| <i>10.4. Data backup.....</i>                                                                 | <i>63</i> |


## II. Attention

➤ If run this software at Windows XP, please download and install “.net framework4.0 ”.


If run at Windows 7 or above ,please ignore it because it is included in operation system .

## III. Software operation


### 1. Log in




Double click “PatrolCS.exe” , go to log in interface .The original user name is “admin”, default password is “123”.

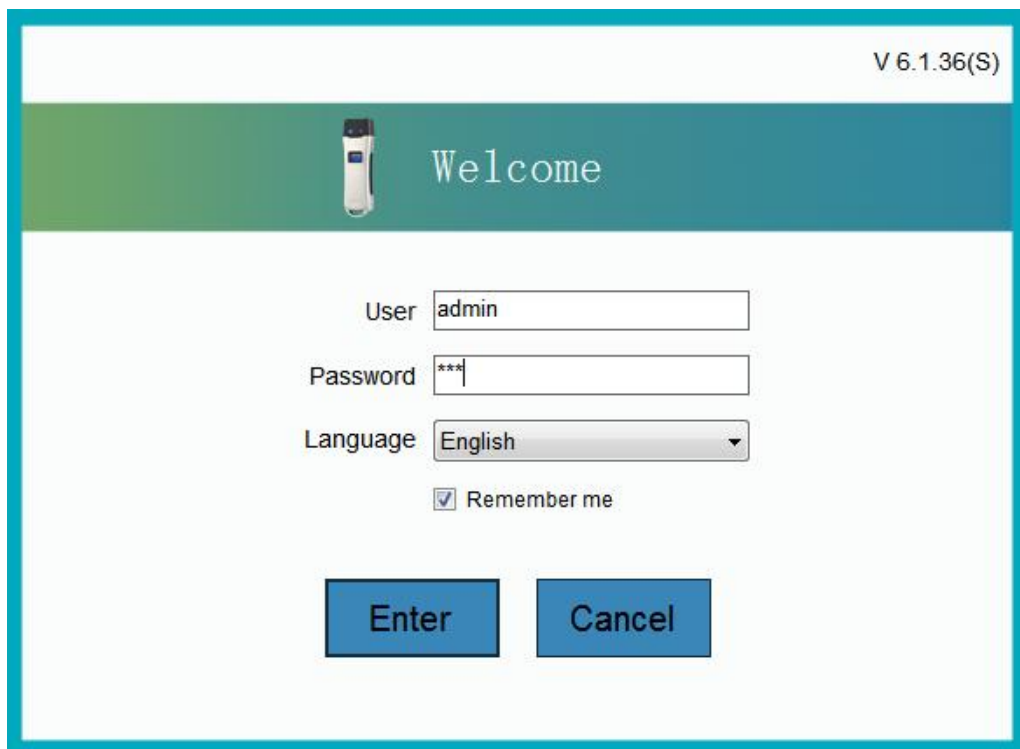

Notice: When the first time to run the software, system will initialize the database. At the same time, it will ask to set super manager's password .

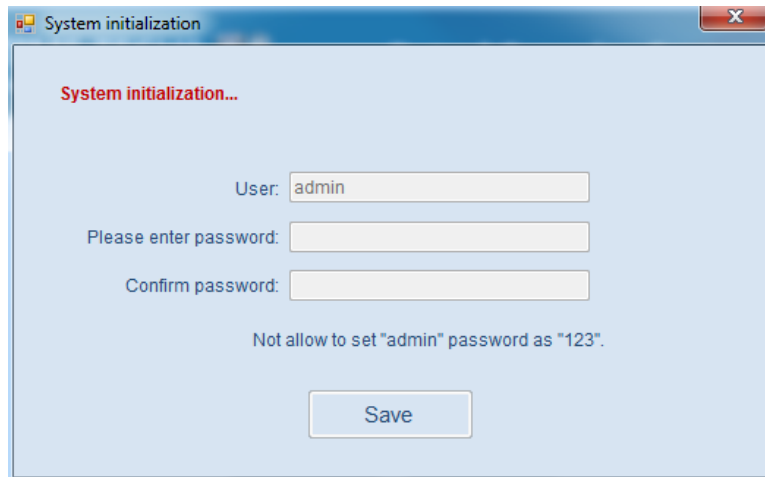

A screenshot of a Windows-style dialog box titled "System initialization". The dialog has a light blue background and a standard Windows window border with a close button (X) in the top right corner. The text "System initialization..." is displayed in red at the top. Below this, there are three input fields: "User:" with the text "admin" entered, "Please enter password:", and "Confirm password:". Below the input fields, a message in grey text states "Not allow to set 'admin' password as '123'.". At the bottom center, there is a "Save" button.

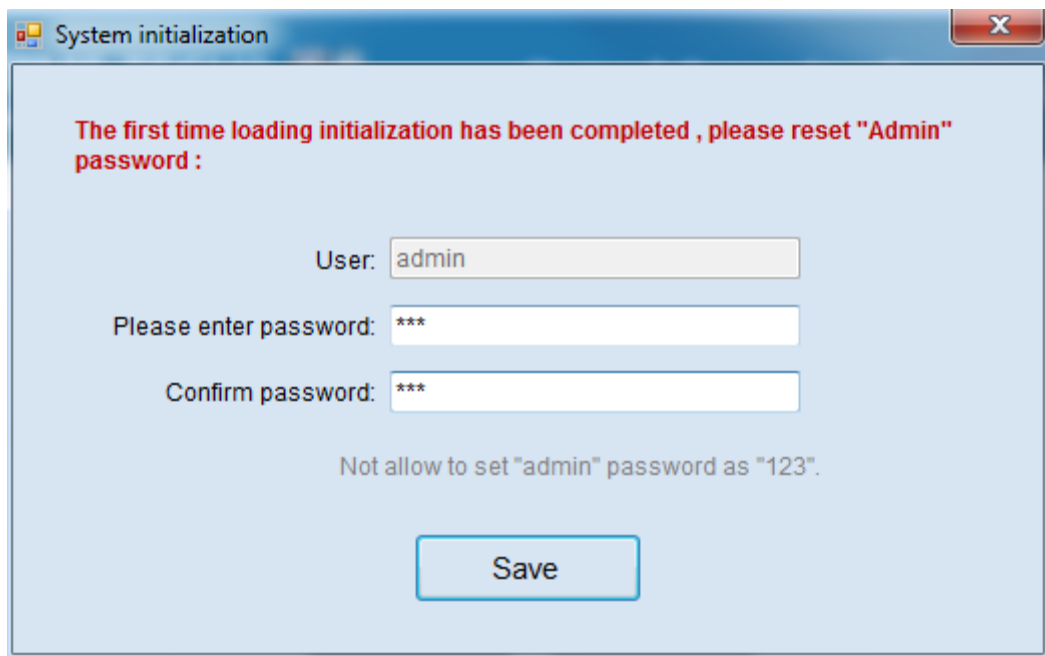

A screenshot of a Windows-style dialog box titled "System initialization". The dialog has a light blue background and a standard Windows window border with a close button (X) in the top right corner. The text "The first time loading initialization has been completed , please reset 'Admin' password :" is displayed in red at the top. Below this, there are three input fields: "User:" with the text "admin" entered, "Please enter password:" with three asterisks "\*\*\*" entered, and "Confirm password:" with three asterisks "\*\*\*" entered. Below the input fields, a message in grey text states "Not allow to set 'admin' password as '123'.". At the bottom center, there is a "Save" button.

## 2. New User

- When you go to Home page at the first time, system will automatically guide you to **New user** page, it will ask

you to set card first “Please set address card first !”, click this button to go to [Card setup] page, this prompt will disappear only if you finish card setting work at this page . **If you just want to test software, you can type an imaginary card ID (8 characters) and route name. As below:**

The screenshot displays the 'Card Manager' application window. At the top, there is a toolbar with buttons: Add, Add From Device, Extract "unknown card", Edit, Delete, Export PDF, Export Excel, and Import Excel. Below the toolbar, there are input fields for 'Card ID:', 'Name:', and a 'Type:' dropdown menu set to 'All Type', followed by a 'Search' button. A table with columns 'Card ID', 'Type', 'Name', and 'Remark' is visible. The first row shows '0FFFFFFF', 'Staff card', and 'admin'. Overlaid on this is a 'Card Operation' dialog box. Inside the dialog, the 'Card ID' field contains '12345446' and the 'Name' field contains 'an imaginary card ID'. The 'Type' section has two radio buttons: 'Address Card' (which is selected) and 'Staff card'. There is a 'Remark:' label followed by a large empty text area. At the bottom of the dialog are 'Save' and 'Cancel' buttons.

| Card ID  | Type       | Name  | Remark |
|----------|------------|-------|--------|
| 0FFFFFFF | Staff card | admin |        |


Card ID: 12345446    Name: an imaginary card ID

Type: ☒ Address Card    ☐ Staff card

Remark:


Save    Cancel

**Note :** This is to be sure the most important settings in software had been done in advance in case you have to back to this page for setting and save much your time .

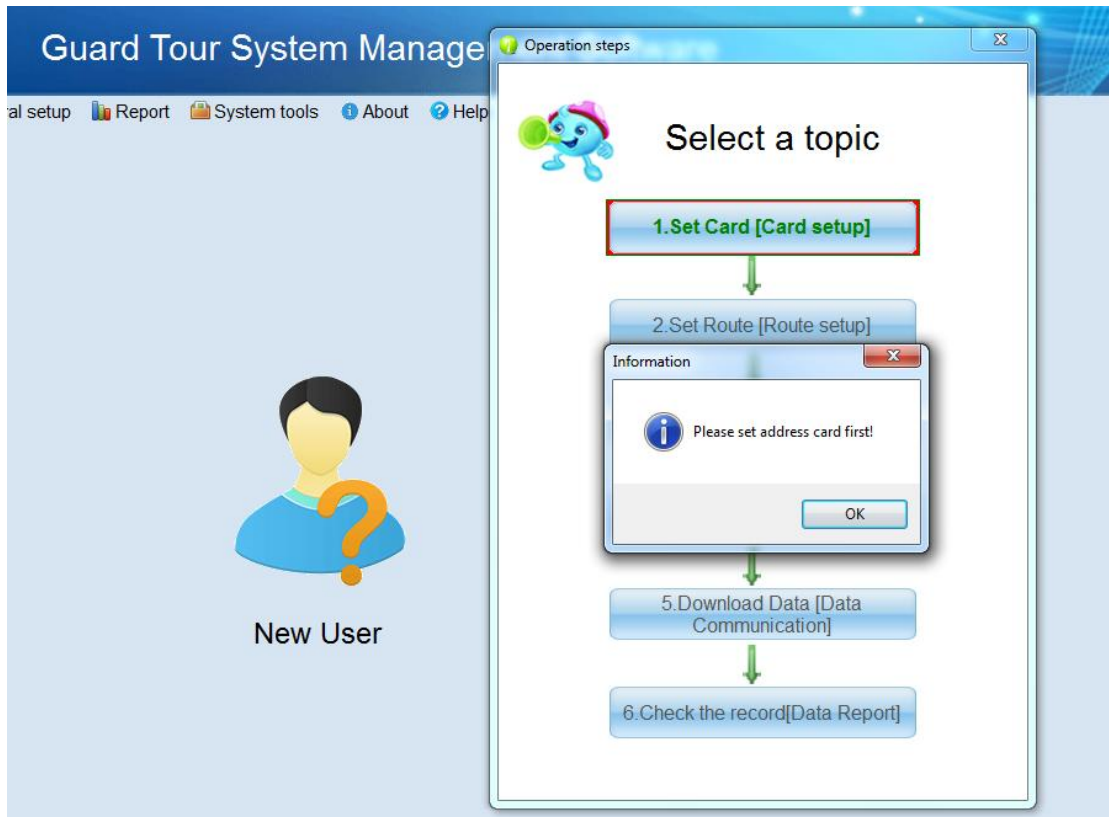


Click “ 1. Set Card [Card setup]” to go to **Card Setup** for card settings page.

You can click “Add”  to add several card manually for testing . If there are card scanned and stored in patrol device , you can click “Add from device”  to add in batches .

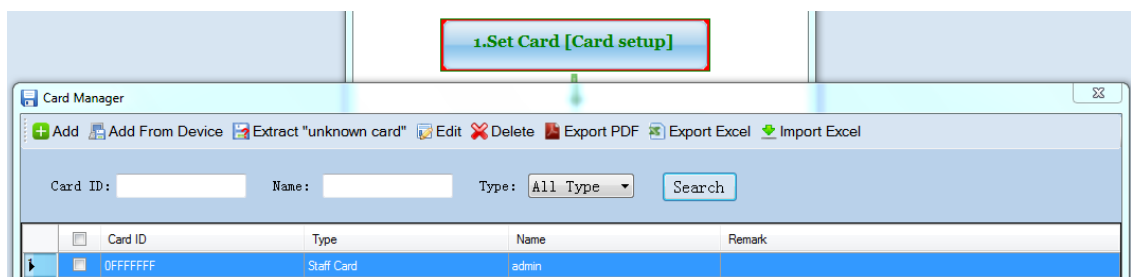


When you finish card adding work , software will guide you to “route setup ” settings . Click this button to go to [Route setup] page, this prompt will disappear only if you finish route settings at this page .


**Note :** This is to be sure the most important settings in software had been done in advance in case you have to back to this page for setting and save much your time .

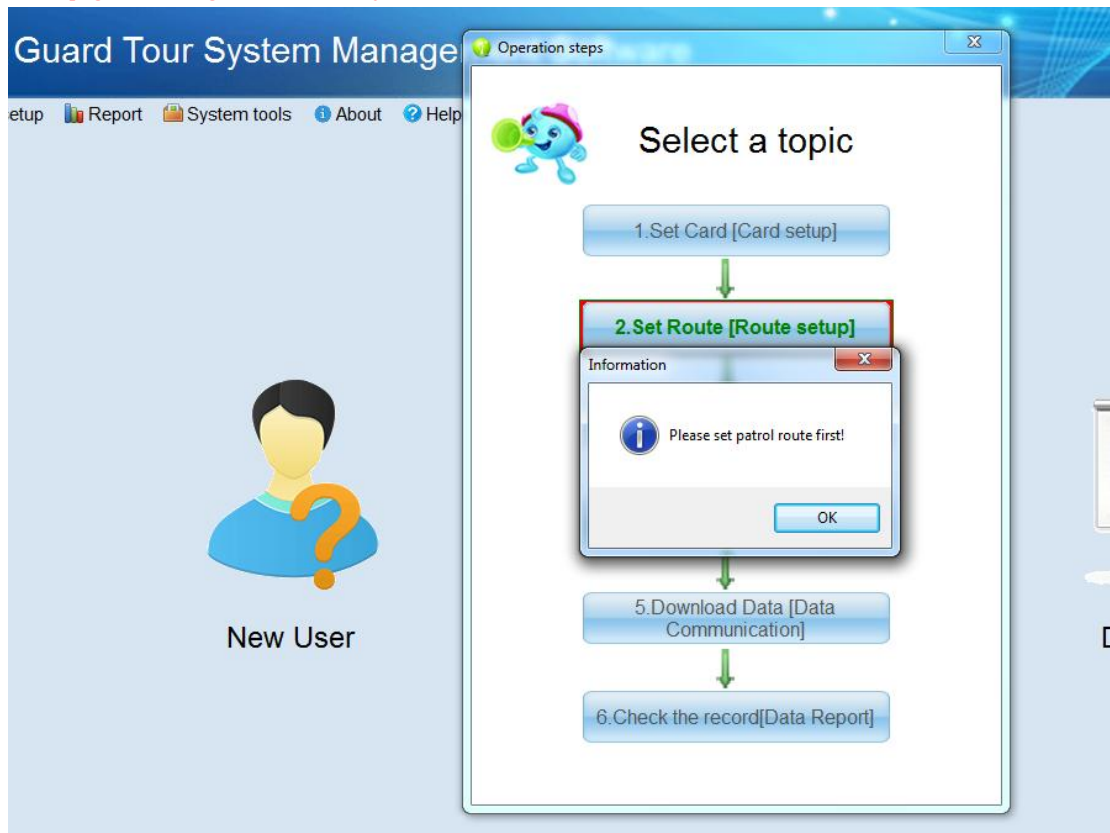

Click “Set Route [Route setup]” to go to route setup page.

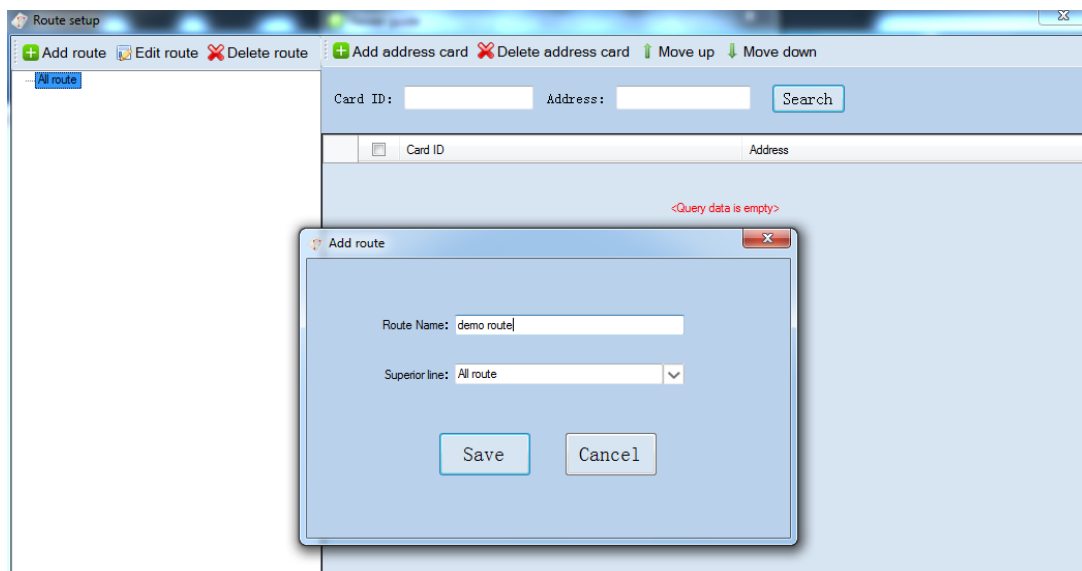

After you finish card settings and route settings ,then you can do other settings or go to other interface. You can follow the steps with the order in “Newer guide” to finish all software operation .

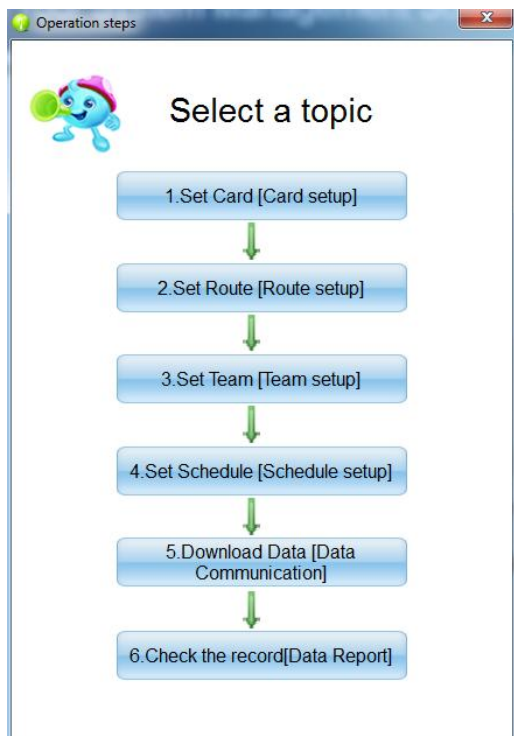


- Card setup : You can set card information (check point , staff ID card , event card )here .
- Route setup : You can set route information here (arrange check point to related patrol route )
- Team setup: You can assign staff to related patrol team .


- Schedule setup: Set patrol plan here
- Download data : You can download data via this interface
- Data report : You can check all data report here

### 3. LOGO title

- Show logo and name

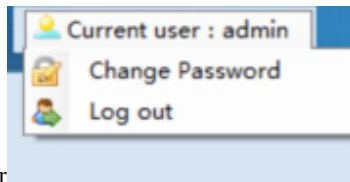

- Show current user

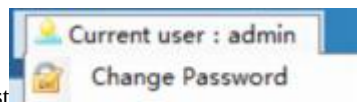


- You can change password from pull-down list
- Type in password (old one) -> type in new password ,confirm password-> save ,finished

- Click user current user name ,you will see log out mould. If click” log out” , interface will back to log in page .

#### 4. Navigation bar

- Click navigation bar, system will go to these page

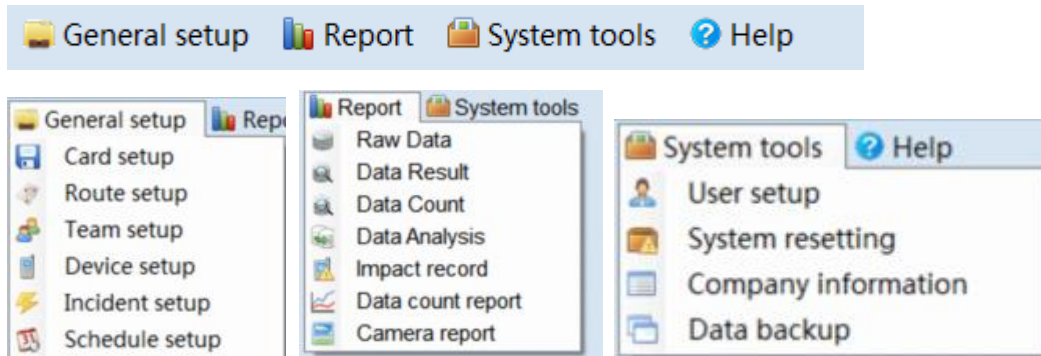



#### 5. Home page display

- Newer guide: General setup steps
- Data communication : Go to Communication Program
- Data report : Query all data and report



Notice : When you log in software at the first time, system will default open database backup, you can close auto-backup manually at “Data base” page manually (as below picture ), then software home page will suggest you to open automatic backup every time when you go to home page.

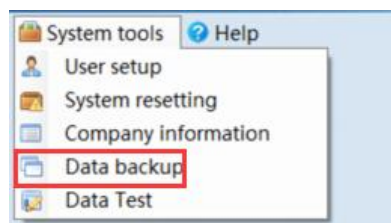

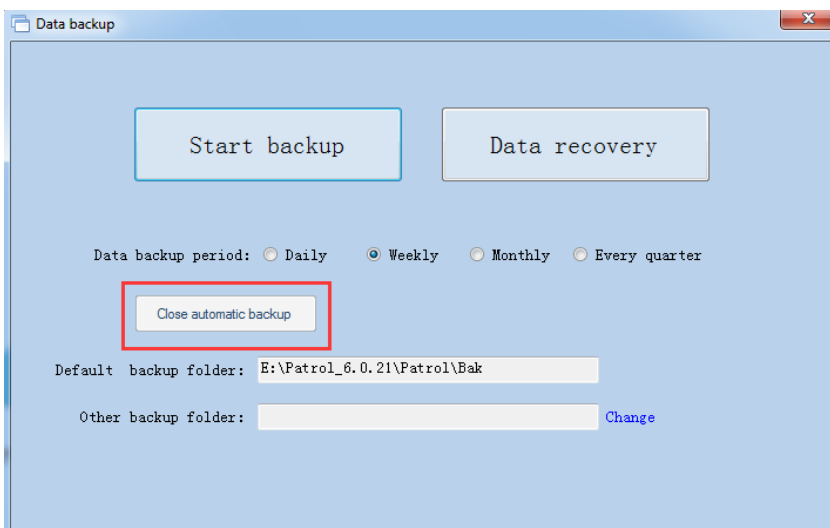


## 6. Data communication

1. Click data communication , you can download data here.




### 2.Communication page (**Basic series device**)


If software not detect patrol device , system will prompt “ Connection not detected , please be sure device is well connected ! ”, please connect device well with computer for communication .

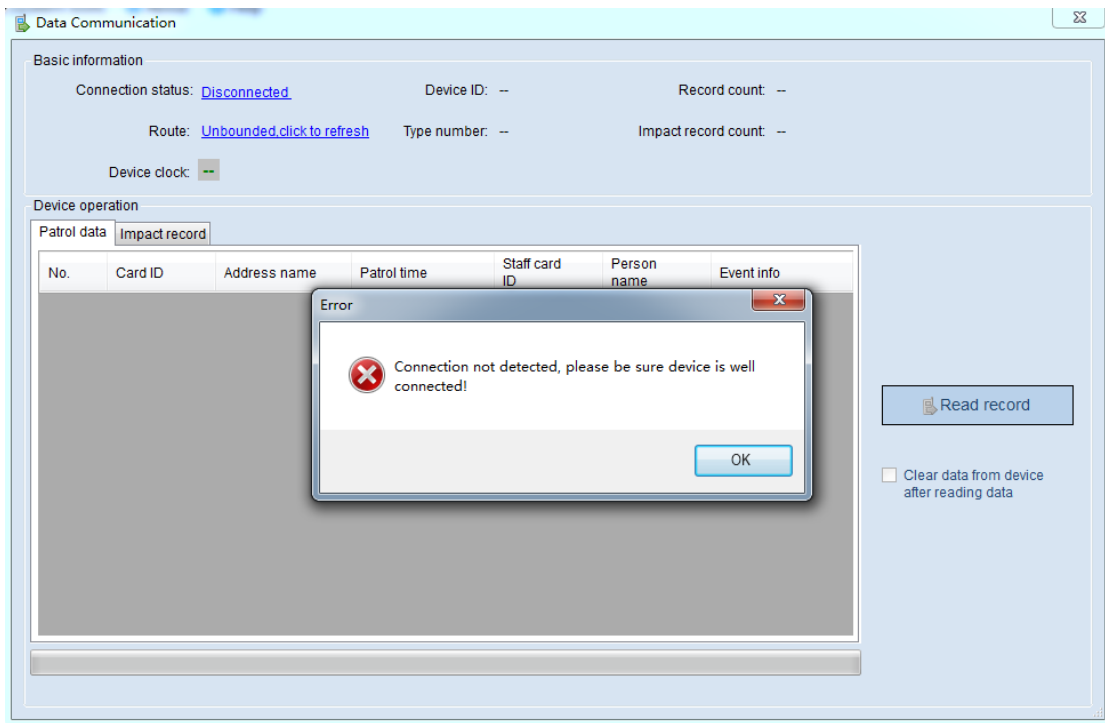

- When the patrol device connect with software at the first time , software will ask you to bind patrol device to software . Please select a patrol route to bind patrol device to .

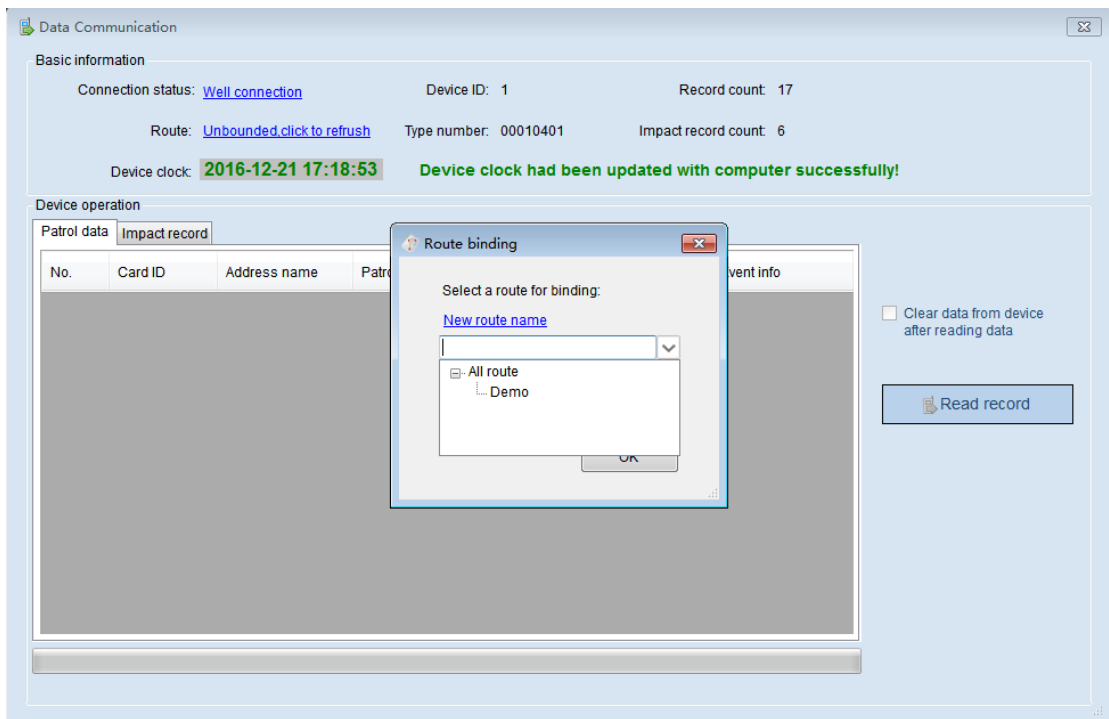

Once device is successfully bound to software, you will see prompt box “OK” .

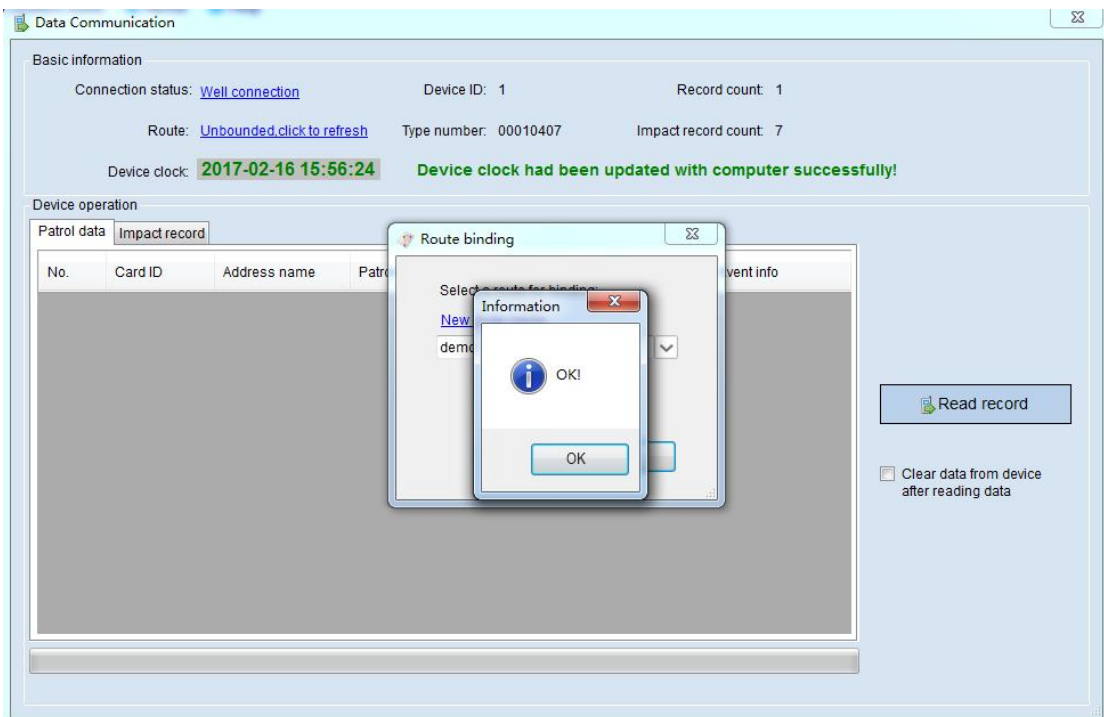


### Basic information:

- Connection status : If device connection status changed, please click “ disconnected ”to refresh device connection status .
- Device’s basic information : Device ID , device type number , record count (patrol logs amount stored ) , route (which patrol route this device work for) ,impact record ( the impact amount stored) .
- Clear data from device after reading data : Software will clear all data from device automatically after reading data .
- If there is impact record stored in device , data will show here when you click “Impact record” . If no impact record generated , there will be empty .

The screenshot shows a software window titled "Data Communication". It has a "Basic information" section with fields for Connection status (Well connection), Device ID (1), Record count (17), Route (Demo), Type number (00010401), and Impact record count (6). Below this is a "Device operation" section with a tabbed interface. The "Impact record" tab is active, displaying a table with 13 rows of data. To the right of the table is a checkbox labeled "Clear data from device after reading data" and a "Read record" button. At the bottom of the window, a status bar reads: "Read patrol data and impact record finished! Record count: 17, Staff card quantity: 0, Using time: 0.148s".


| No. | Card ID  | Address name    | Patrol time         | Staff card ID | Person name    | Event info |
|-----|----------|-----------------|---------------------|---------------|----------------|------------|
| 1   | 002E041A | 1F              | 2016-12-12 09:55:07 | 0FFFFFFF      | Unknown per... |            |
| 2   | 001E9788 | Unknown address | 2016-12-12 09:55:09 | 0FFFFFFF      | Unknown per... |            |
| 3   | 00CD197F | 3F              | 2016-12-12 09:55:12 | 0FFFFFFF      | Unknown per... |            |
| 4   | 0077FB27 | 2F              | 2016-12-12 09:55:14 | 0FFFFFFF      | Unknown per... |            |
| 5   | 001E9788 | Unknown address | 2016-12-12 09:55:17 | 0FFFFFFF      | Unknown per... |            |
| 6   | 00CD197F | 3F              | 2016-12-12 09:55:19 | 0FFFFFFF      | Unknown per... |            |
| 7   | 002E041A | 1F              | 2016-12-13 15:32:05 | 0FFFFFFF      | Unknown per... |            |
| 8   | 002E041A | 1F              | 2016-12-13 15:32:09 | 0FFFFFFF      | Unknown per... |            |
| 9   | 002E041A | 1F              | 2016-12-13 15:32:12 | 0FFFFFFF      | Unknown per... |            |
| 10  | 002E041A | 1F              | 2016-12-13 15:32:23 | 0FFFFFFF      | Unknown per... |            |
| 11  | 002E041A | 1F              | 2016-12-13 15:32:27 | 0FFFFFFF      | Unknown per... |            |
| 12  | 0017C4FD | Unknown address | 2016-12-21 15:51:10 | 0FFFFFFF      | Unknown per... |            |
| 13  | 00179AE5 | Unknown address | 2016-12-21 15:51:12 | 0FFFFFFF      | Unknown per... |            |

If you tick “Clear data from device after reading data , software will clear data automatically from device . **Please be careful with this step, data will not be recovered to device .**

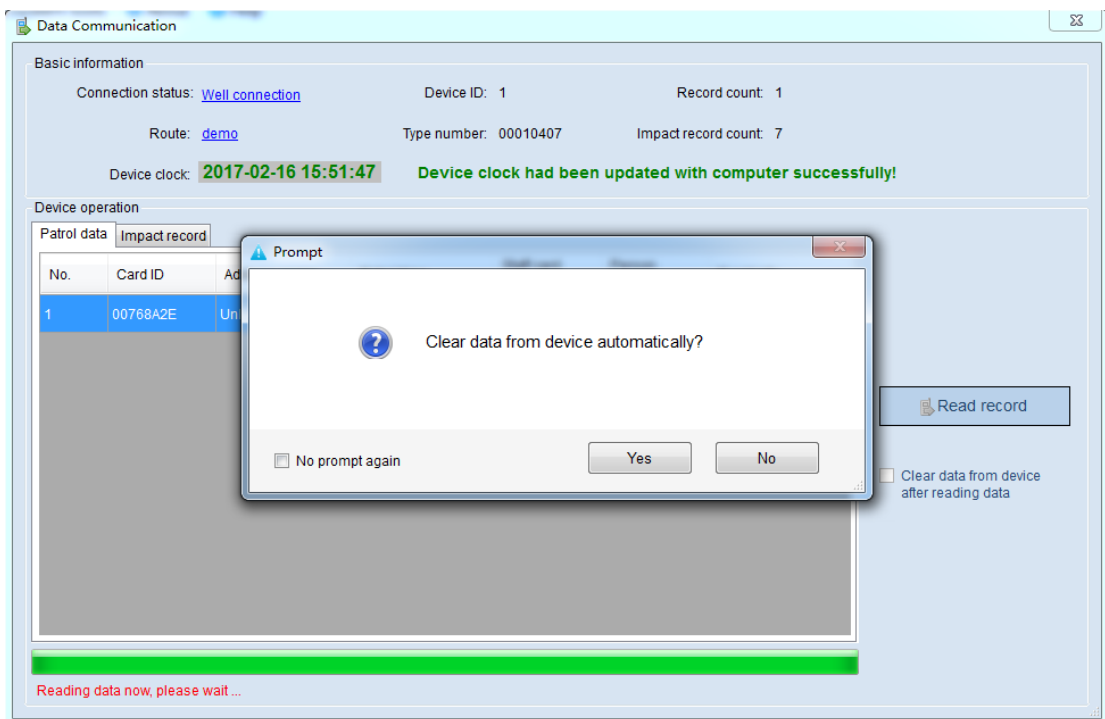

## 7. Report

Click “Data Report “, you can see all report and result here . Including “ Raw data”, “Data result”, “Data count” , “Data analysis ”, “Impact record” , “Data count report” and “Camera report”.

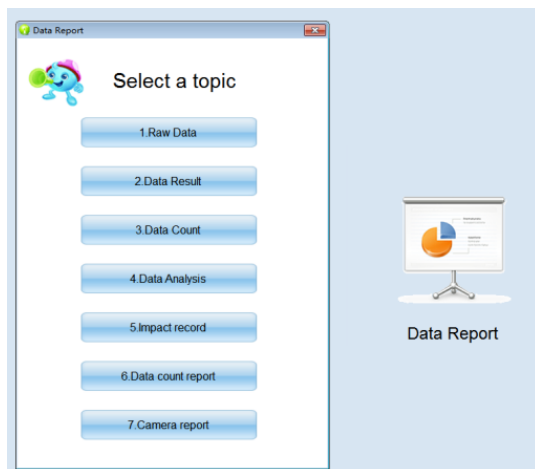


## 8. General setup

### 8.1 .Card setup

There are two way to set up tags (check point , staff ID card , event card ) :

- A. Add manually (this method cost much time and easy making mistake )
- B. Add from device (this method recommended . Please read tags with patrol device in order , this will make “ register new tags “ very easy and efficient) .
- C. Extract “Unknown card” (this method recommended . Every time when you connect patrol device with software , software will save all cards automatically to database including “ Unknown card ”, when you click **Extract “Unknown card”** ,all unknown card saved in software will be displayed in list ) .


1. Add manually :

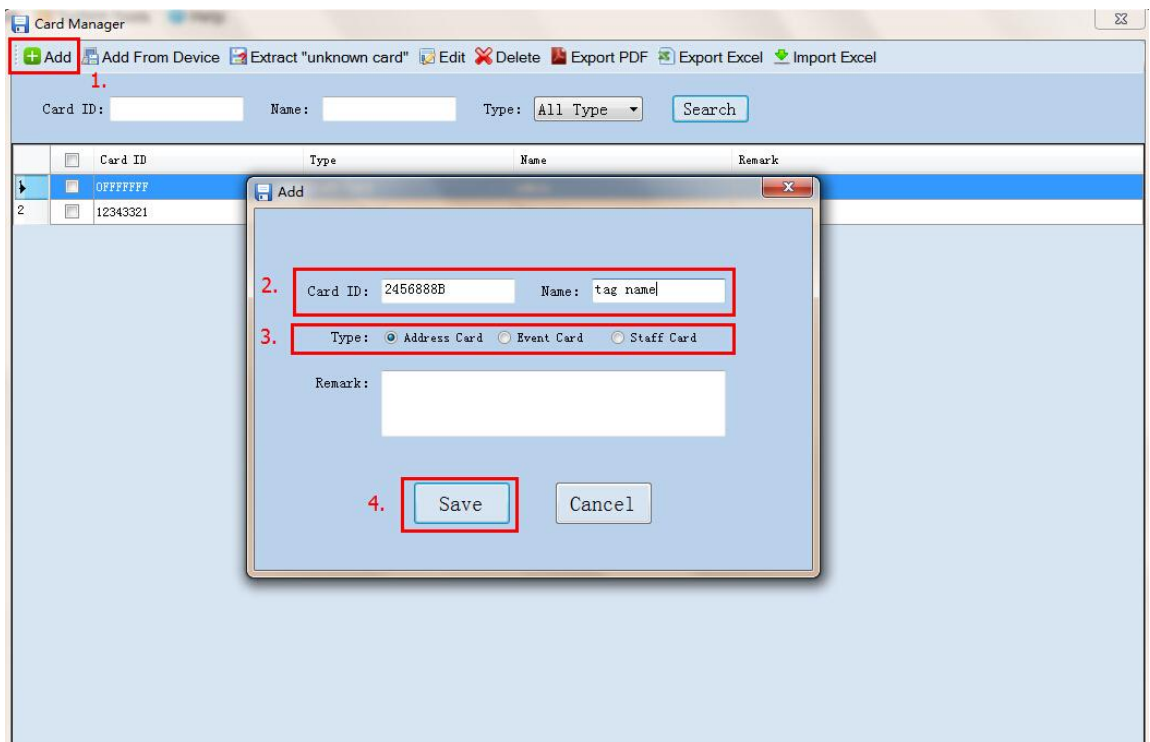

2. Add from device : Please read all should registered card with patrol device in order in advance . Software will show all card with reading time order , also the device must be connected with software when you do this . You can register new card under communication interface or this interface by clicking **Add From Device** . If not

work ,please check whether device is well connected with software , you can click” No device detected- click to refresh”

No device detected-click to refresh

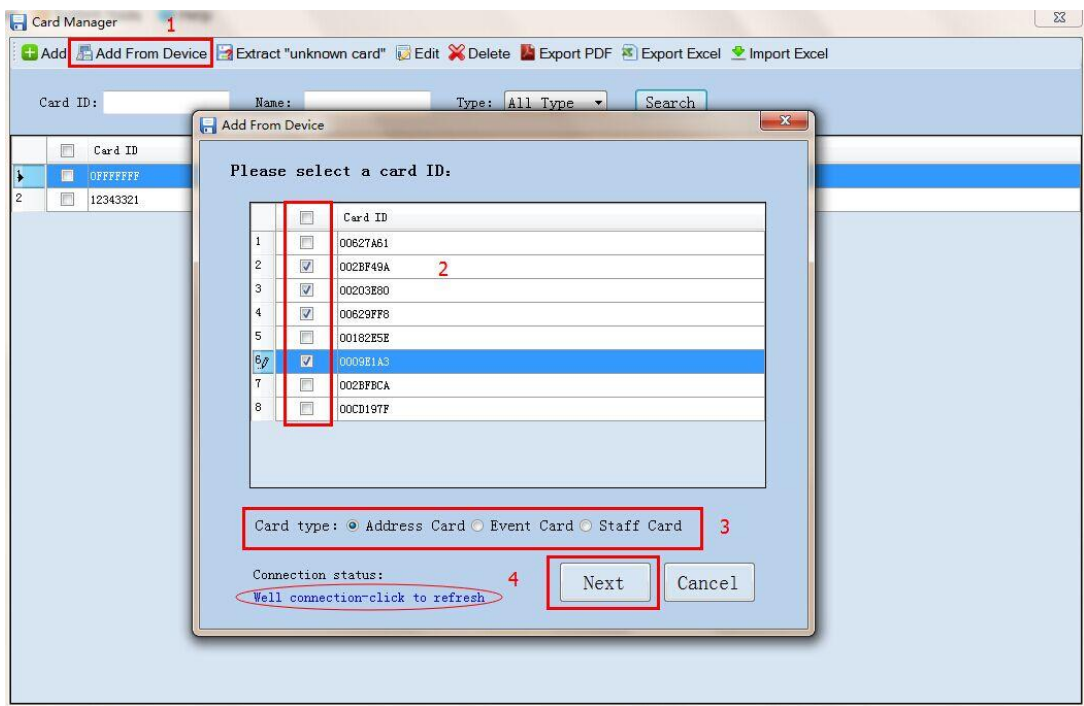 to refresh connection .

3. Extract “Unknown card ”: You can operate this button even while device is connected with software or not connected . If there is device connected with software, all card saved in database (including all patrol device connected with software ) and current unknown card saved in patrol device will all displayed in list . If no device connected with software , all unknown card from previous device will be displayed in list .

If you save some tags wrongly, you can also click “delete ” to remove from the list you want to save

**Add From Device**

Please add card information:

|   | Card ID  | Type         | Name            | Remark |        |
|---|----------|--------------|-----------------|--------|--------|
| 1 | 0064968D | Address Card | write name here |        | Delete |
| 2 | 0062AE14 | Address Card |                 |        | Delete |
| 3 | 0062AAA0 | Address Card |                 |        | Delete |
| 4 | 0062CFE6 | Address Card |                 |        | Delete |
| 5 | 00CD197F | Address Card |                 |        | Delete |
| 6 | 002CF631 | Address Card |                 |        | Delete |
| 7 | 000D9766 | Address Card |                 |        | Delete |

Save Cancel

While your first time to connect device with software, and if there is none card registered , software will prompt “Extract from current device ?” , you can extract card from device and register them to software directly. You can also clear all data from software by clicking [Clear all data from device](#) .

**Card Manager**

[Add](#)
[Add From Device](#)
[Extract "unknown card"](#)
[Edit](#)
[Delete](#)
[Export PDF](#)
[Export Excel](#)
[Import Excel](#)
[Clear all data from device](#)

Card ID:  Name:  Type:  Search


|  | Card ID  | Type       | Name  | Remark |
|--|----------|------------|-------|--------|
|  | 0FFFFFFF | Staff card | admin |        |

Information


? Extract card from current device?

Yes No


4. Modify card : If you want to modify existing card information, please tick the card and click “edit ” for modification (you can modify card ID or card name , remark or card type).

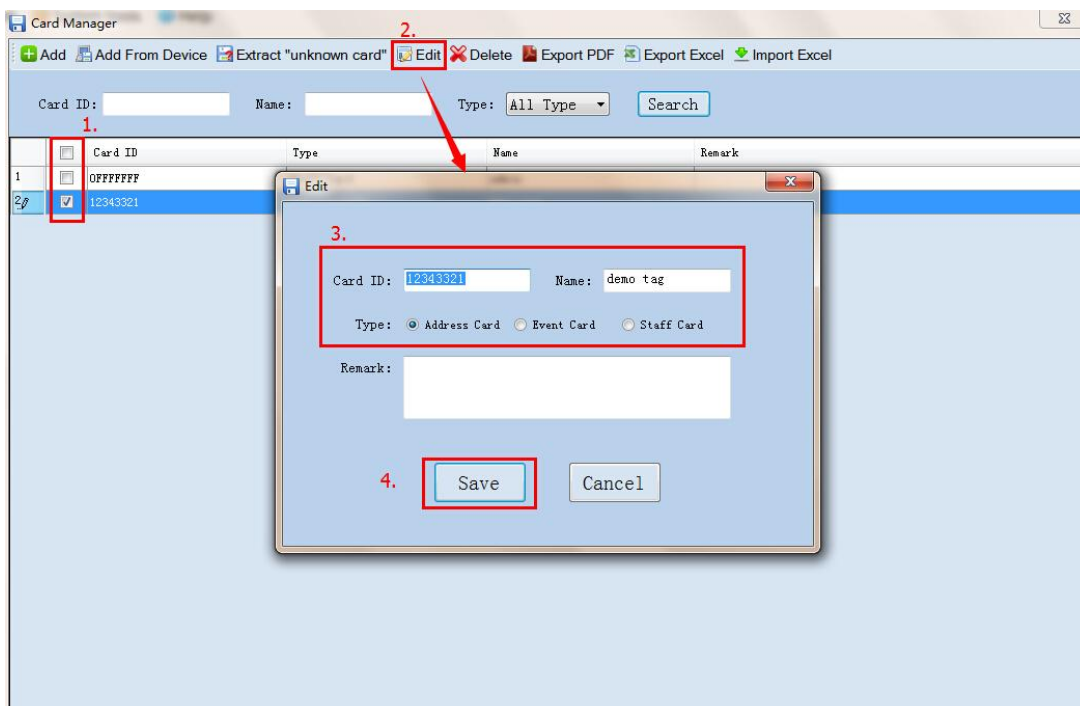

5. Delete card : Please tick the card you want to delete , click “ delete ” and “OK” to delete .

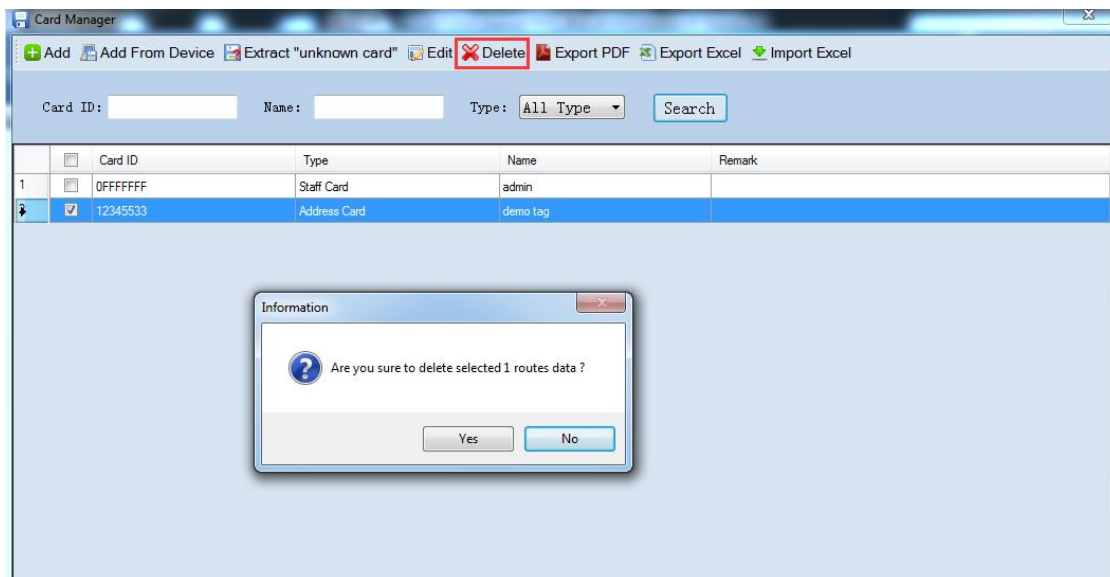



\*Notice : If show this prompt , please go to the related patrol route and patrol schedule , then you can delete card .

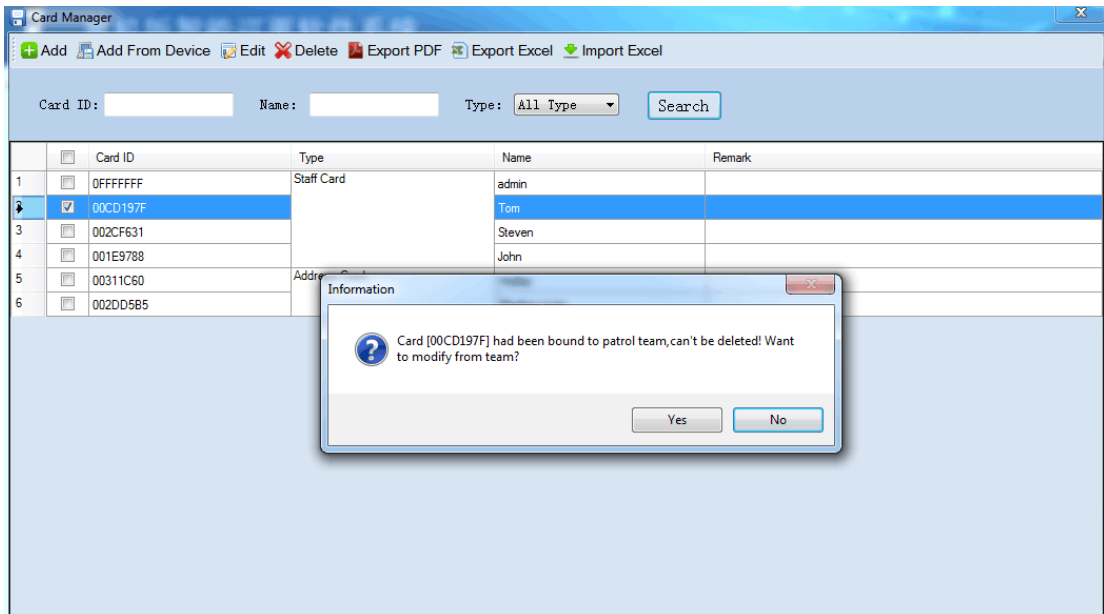

6. Export card list : You can export “pdf” and “ Excel ” format .

|    |                  |              |              |        |
|----|------------------|--------------|--------------|--------|
| G5 |                  |              |              |        |
|    | A                | B            | C            | D      |
| 1  | Card Information |              |              |        |
| 2  | Card ID          | Type         | Name         | Remark |
| 3  | 0FFFFFFF         | Staff Card   | admin        |        |
| 4  | 00CD197F         | Staff Card   | Tom          |        |
| 5  | 002CF631         | Staff Card   | Steven       |        |
| 6  | 001E9788         | Staff Card   | John         |        |
| 7  | 00311C60         | Address Card | Hobby        |        |
| 8  | 002DD5B5         | Address Card | Meeting room |        |
| 9  |                  |              |              |        |
| 10 |                  |              |              |        |

7. If much card should be added to software, you can make a “Excel” table which including all card (Because there is format limit , the title of Excel must be the same with the exported one ,please export an Excel from software for reference to see the format , then fill in all information follow the exported Excel , or will be invalid ).

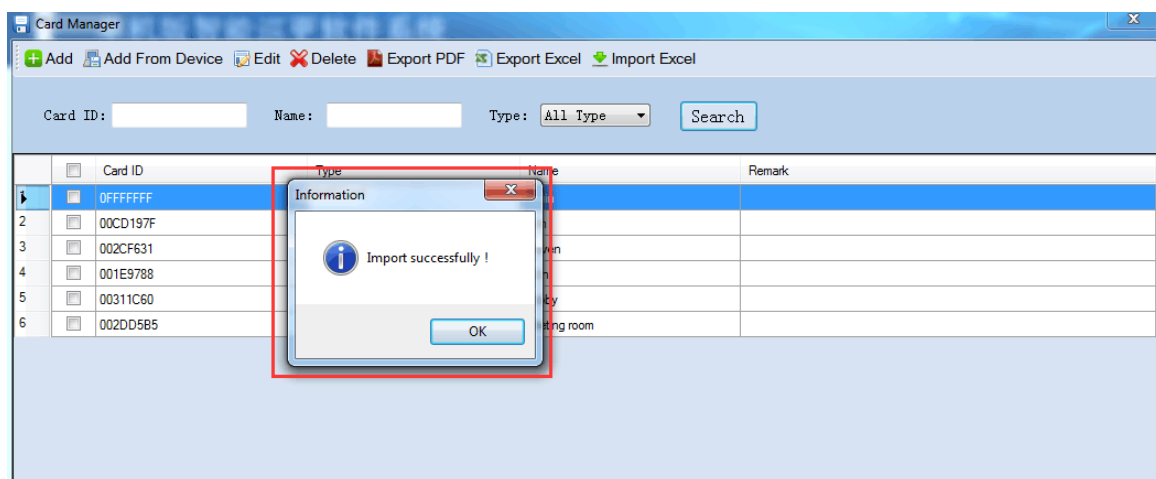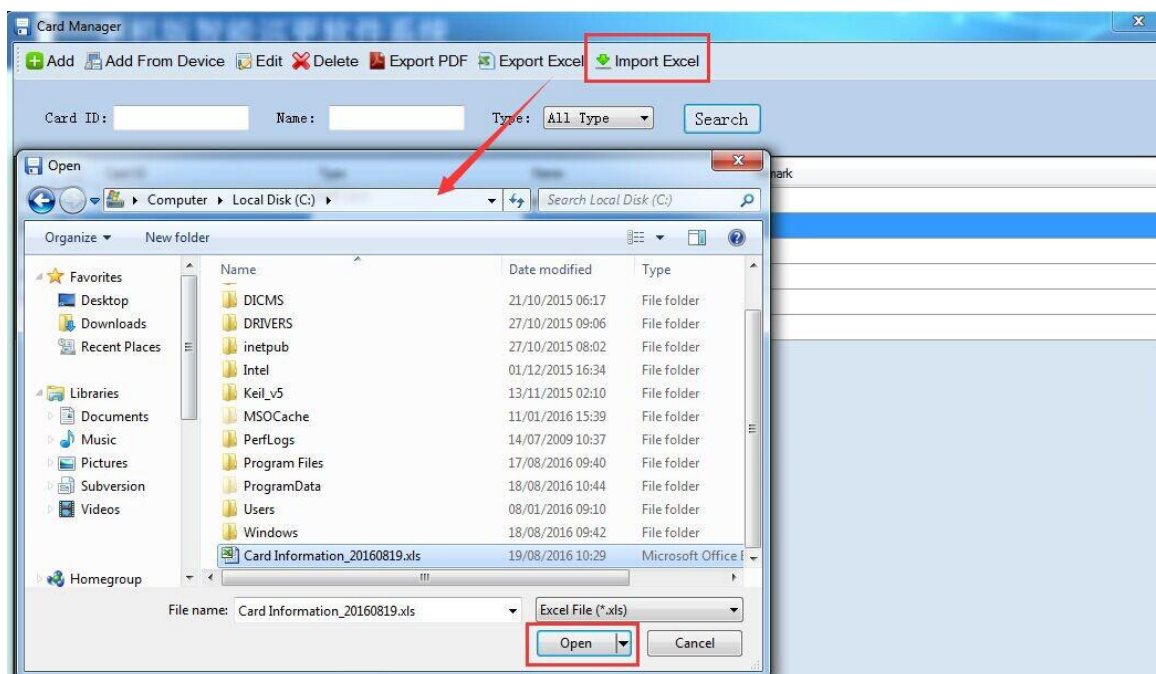

8. Query card information : You can query card by “Card ID ” , “ Card name ” , “Card type” to search the card you want

Card Manager

Card ID: 0064968C    Name:    Type: All Type   


|   | Card ID  | Type         | Name            | Remark |
|---|----------|--------------|-----------------|--------|
| 1 | 0FFFFFFF | Staff Card   | admin           |        |
| 2 | 0064968C | Address Card | write name here |        |
| 3 | 0062AE14 |              | 2F              |        |

## 8.2. Team setup


This function is use for manage patrol officer . For example , if there are 2 shift for patrol working : morning shift and night shift , 3 officer at morning shift , 4 officer at night shift . You can manage their information here .

1.Create a new team


1. Select the parent team --- Click “Add team ”--- Enter team name --- Save

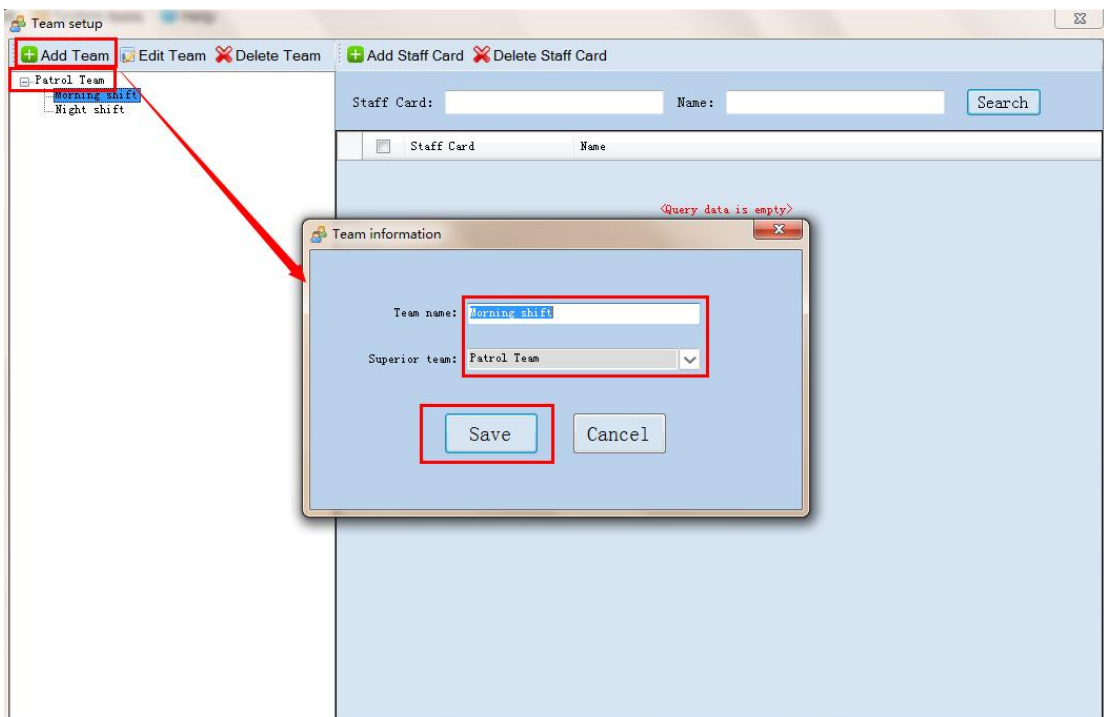


2. You can edit team or delete team information by click these



3. Add inspector to related patrol team : Select patrol team --- Click “Add staff card ” --- Tick staff card you want to add --- Click “Save” .

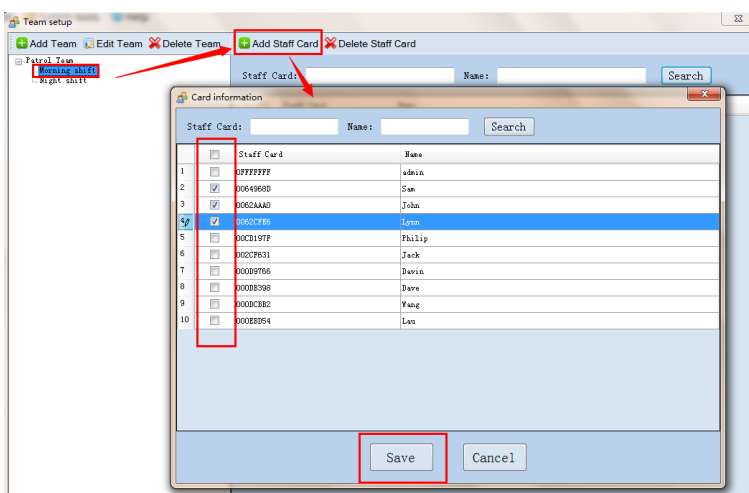


#### 4. Delete inspector from existing patrol route

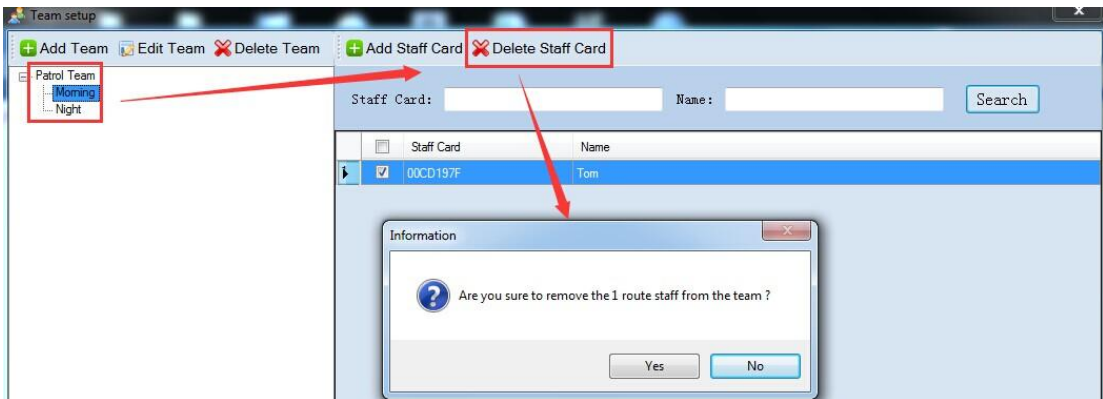


5. Query : You can query the inspector by staff card ID or name .

### 8.3. Route setup


1. Create a new route : Default is all route displayed here . If you want to create a new route , please select a parent node first then click “add ” --- Enter route name --- Save .

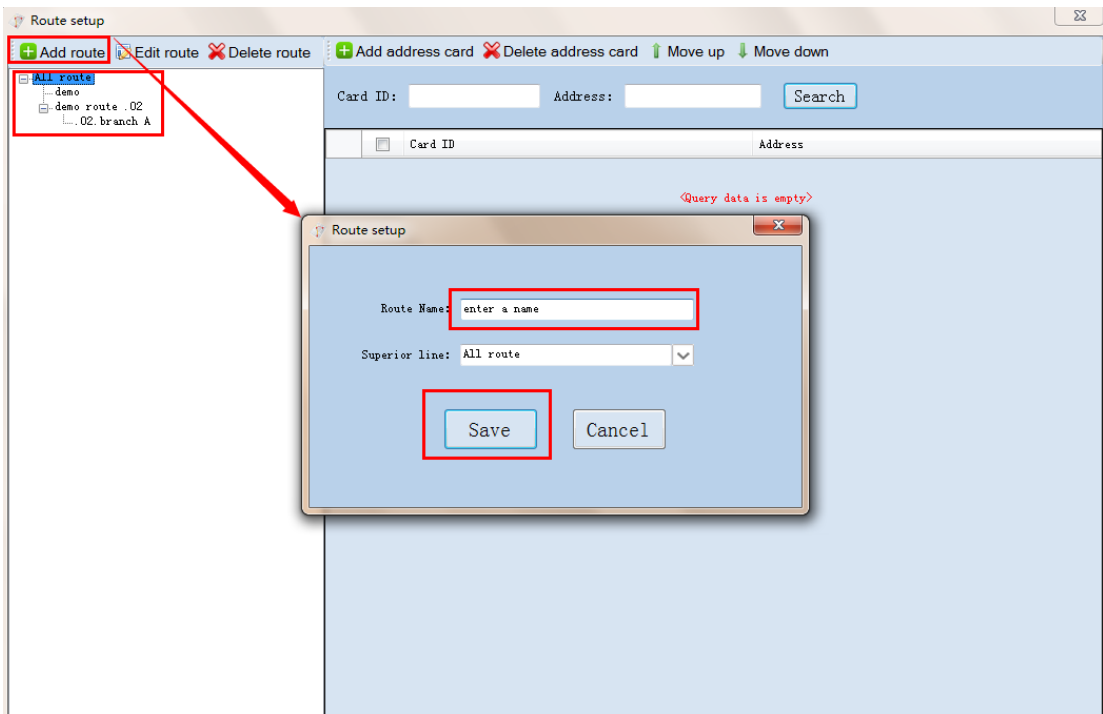



2. Edit route name : If you want to modify route name , click “ edit ” for modification .

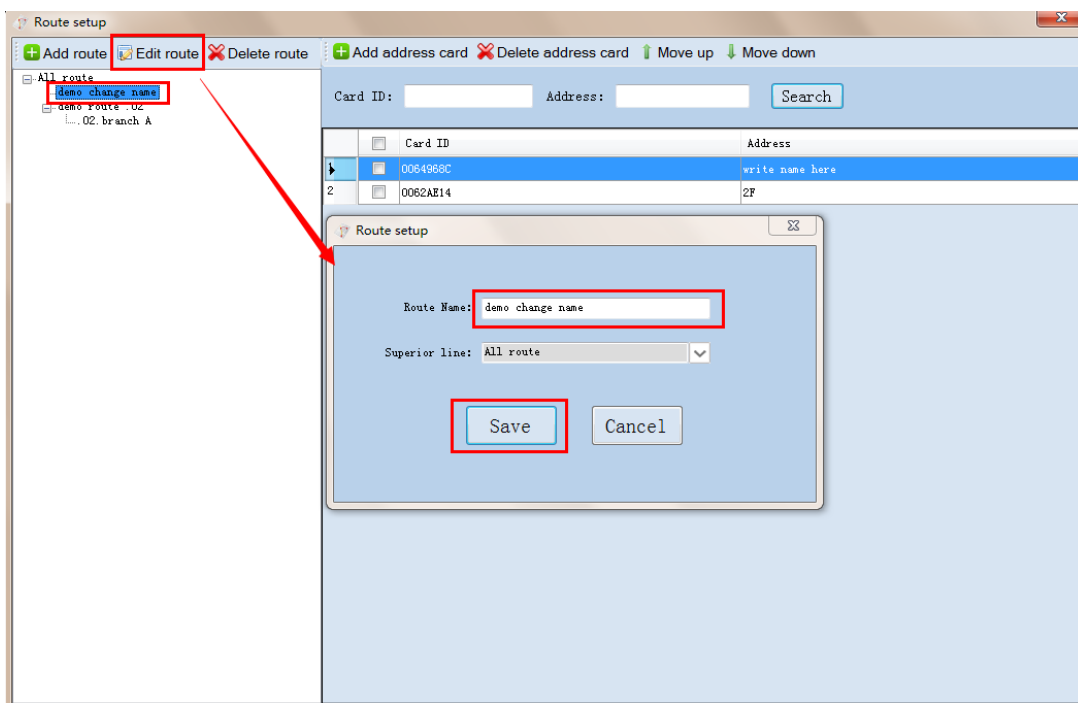


3. Delete route : Select route --- Click “ delete” to delete patrol route .

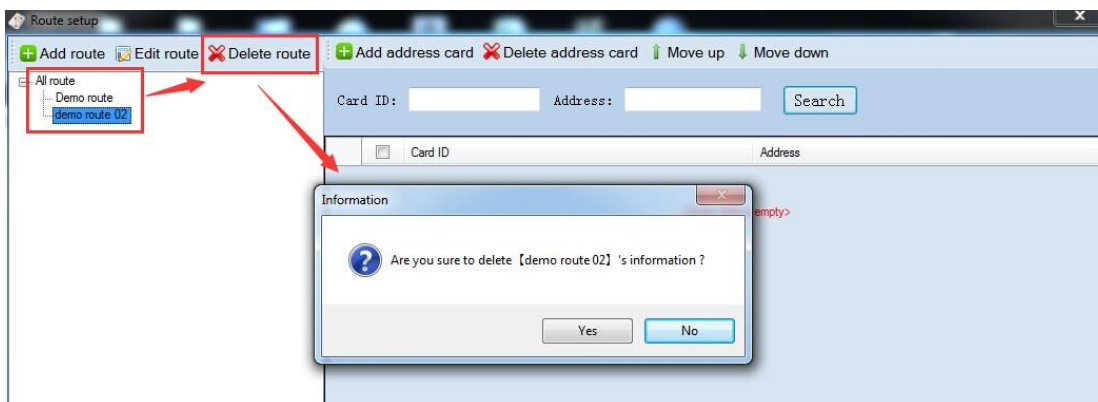



Notice : If some device is bounded to your selected route , or there are some check point are bounded to your selected route , or there are schedule existed in your selected route ,system will not allow you to delete device , please go to communication interface first to change device’s binding route , or delete check point from selected route, or delete schedule from selected route , then you can delete this route .

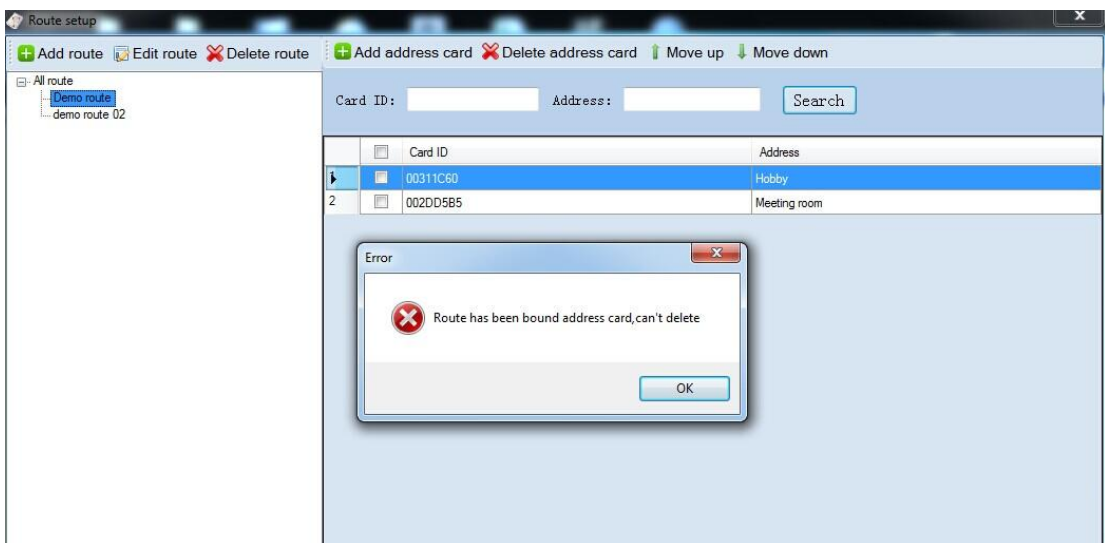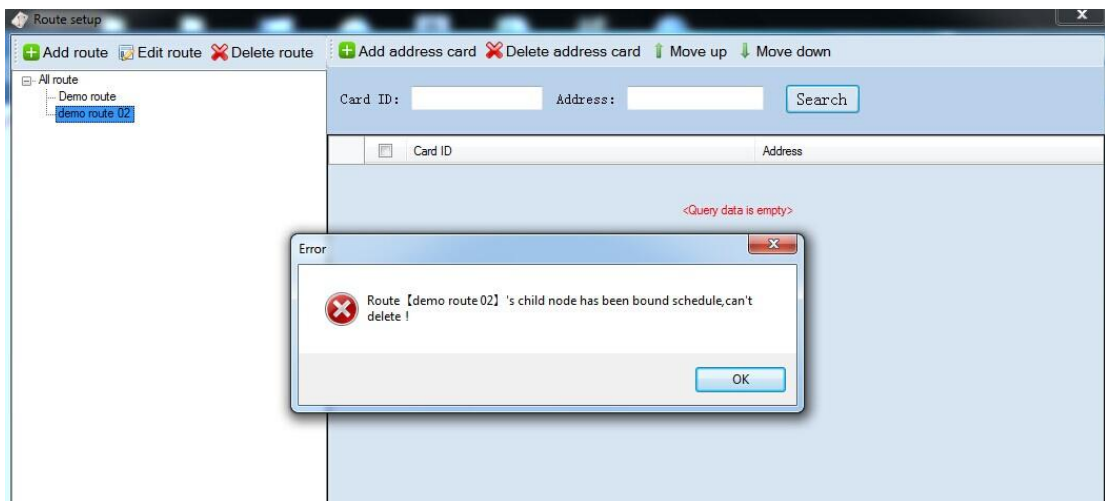

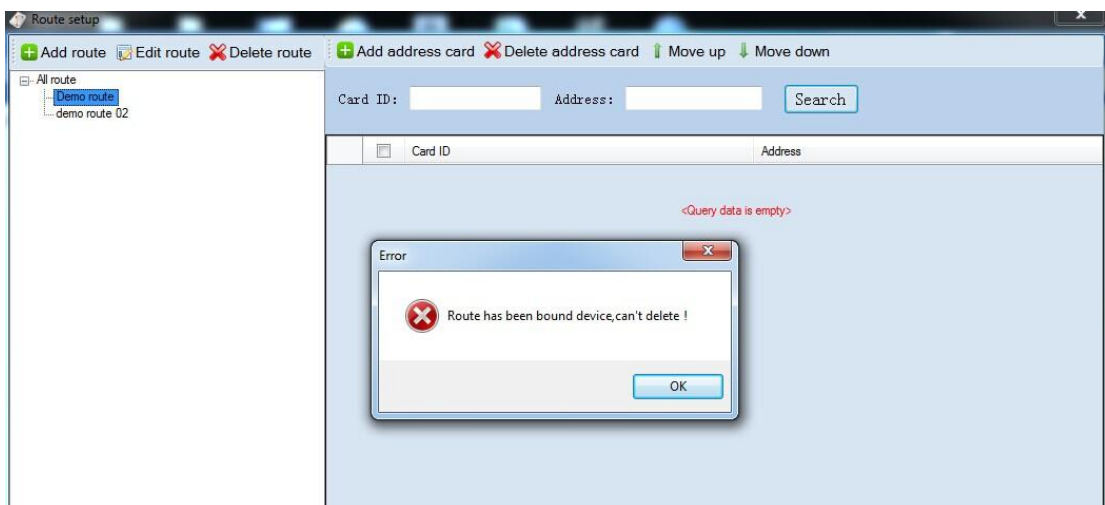


4. When you click route name , if right box show <NO DATA> , which means no any check point under this patrol route.

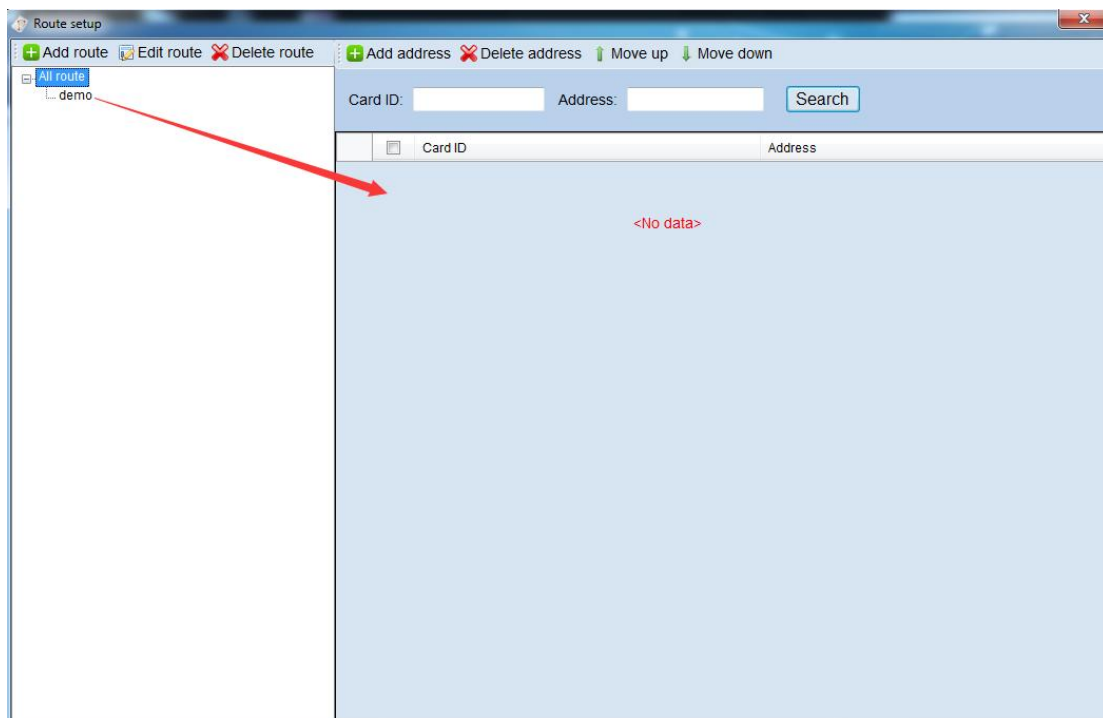

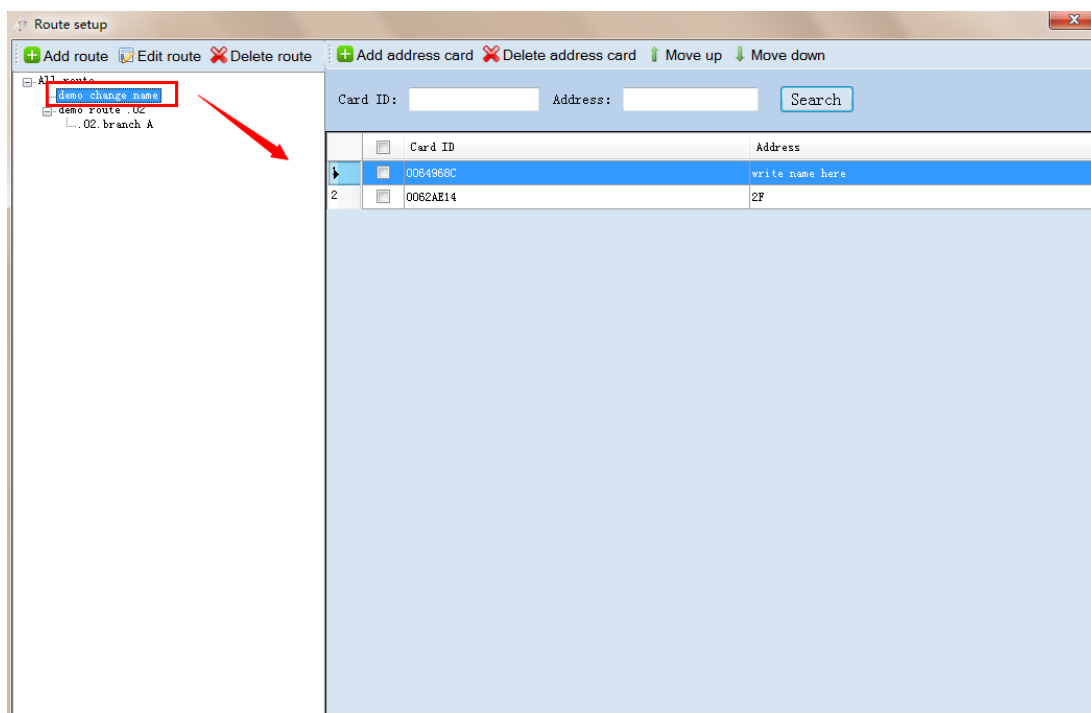


5. Add card to patrol route : Select patrol route --- Click “add ”--- Select card --- Click “Save ”. Tick all , you can select all card , click “Close ” can close window .

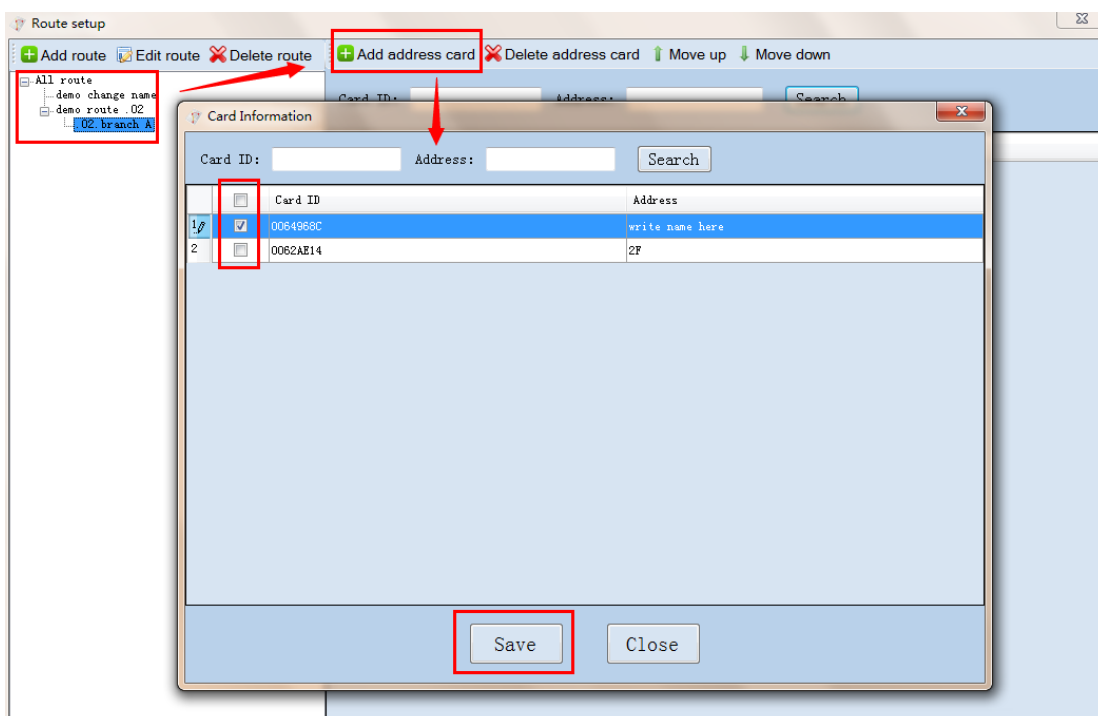


If you want to query some specified card, you can query with Card ID or name here to find and add them soon .

6. Delete card from patrol route : Select patrol route --- Tick card you want to delete--- Click “ delete address card ” .

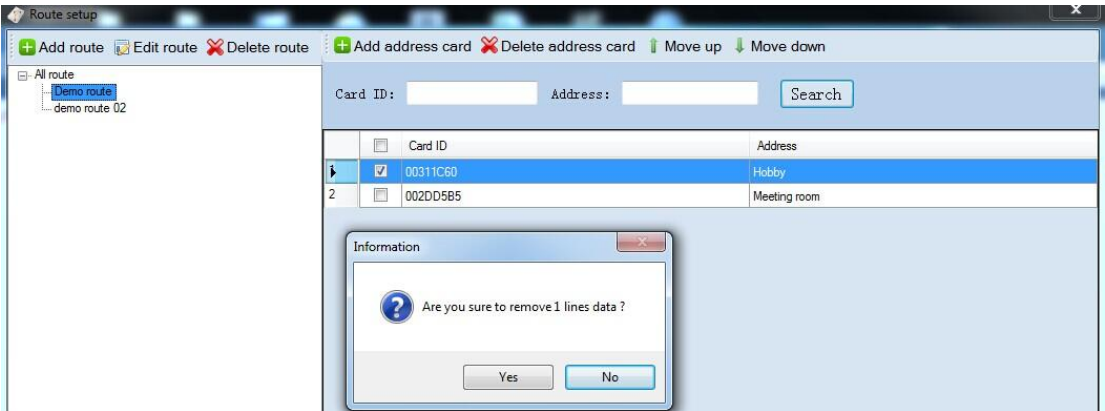

7. “Up” “Down” : Click “Move up” or “ Move down” to move cards order . (\* check point ranking order here is the patrol order security officer should followed . Please be noted in case of data disorder) .

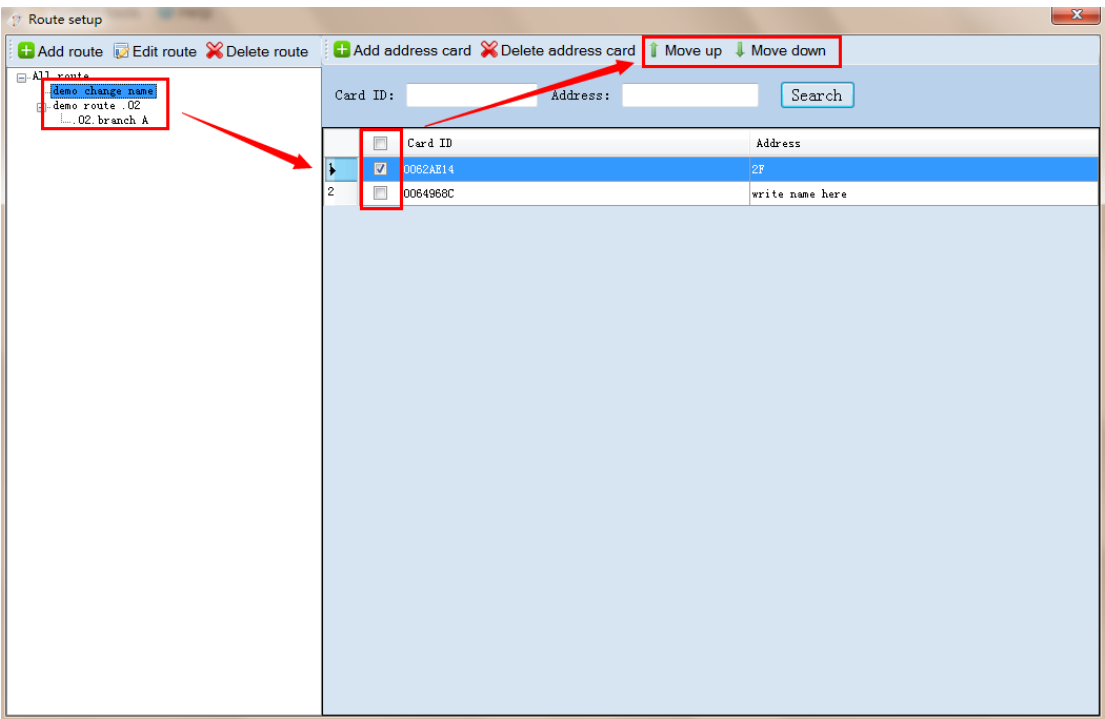

# 8.4. Device setup

- 1. Edit device information (you can change device binding from one route to another route).

Device operation

Device ID:

1511162112

Type number:

10407

Patrol route:

demo

Save

Cancel

- 2. Delete device information : Select device and click “ delete” , you can delete device from software (this also means cancel device binding from patrol route ) .
- 3. Query device information : You can query device information by device ID , belonging route name and type ID .

Device setup

Edit

Delete

Device ID:

Route Name:


Type number:

Search

|  | Device ID  | Route Name       | Type number |
|--|------------|------------------|-------------|
|  | 1511162112 | demo change name | 10407       |

# 8.5. Schedule setup

- 1. Create schedule : Select patrol route --- click “ Add schedule ”--- Enter schedule time and other basic information --- click “add time ”--- click “Save ”.

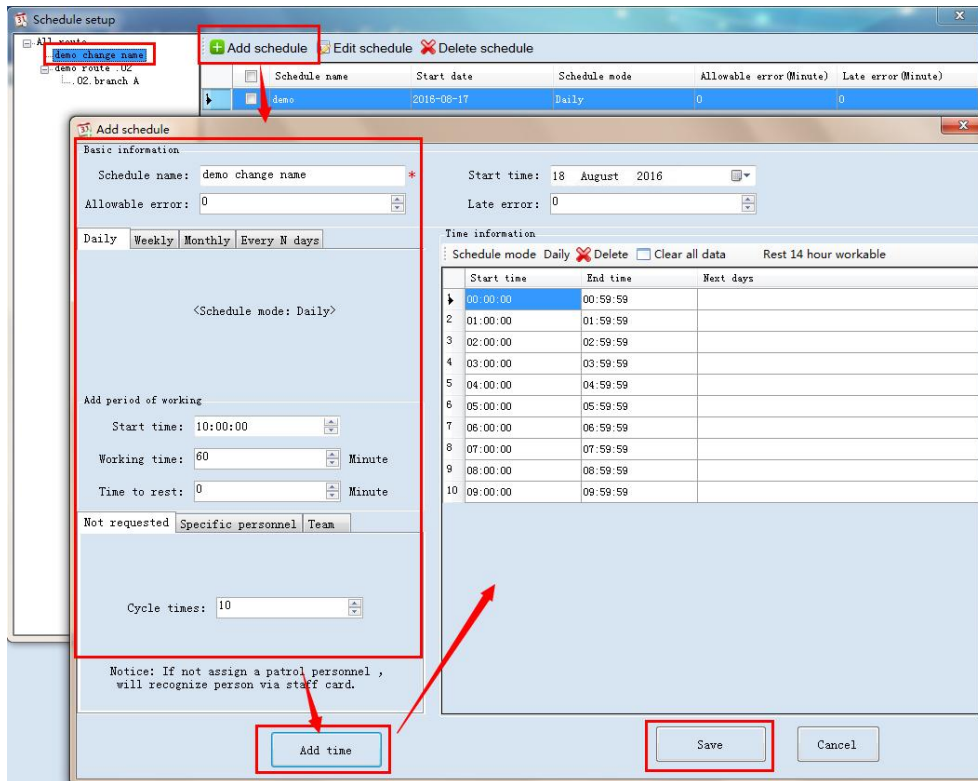

### (1) Basic information of schedule

- Schedule name : The name of schedule . \* required
- Start time: The execution time of this schedule
- Allowable error : If actual patrol time is within the allowable error you set, the result will be regard as no problem . For example : if a schedule time is from 8:00 to 10:00 am , the “allowable error ” is 5 minutes , so the actual patrol time from 07:55-10:05 are all no problem ,regarded as “Qualified ”
- Late error : If a schedule is from 8:00-10:00am , the “late error” is 10 minutes , so the actual patrol time from 10:05-10:10 will be regarded as “Late” .Please be noted that “Late error ” must be larger than “allowable error” .

Basic information

|                  |              |             |                |
|------------------|--------------|-------------|----------------|
| Schedule name:   | Demo route * | Start time: | 18 August 2016 |
| Allowable error: | 1            | Late error: | 3              |

### (2) Add patrol time

- Patrol period selection : Set the execute patrol period of your schedule

☒ Daily
 ☐ Weekly
 ☐ Monthly
 ☐ Every N days

Week selection

☒ Monday
 ☒ Tuesday
 ☒ Wednesday
 ☒ Thursday

☒ Friday
 ☐ Saturday
 ☐ Sunday

### Add working of period

Add period of working

Start time: 00:00:00

Working time: 60 Minute

Time to rest: 0 Minute

- Start time : The execute time of patrol within your patrol period
- Working time : The working running hour for each patrol cycle
- Time to rest : The rest time between 2 patrol cycle . For example , the first patrol cycle is form 8:00am-9:00am, **the rest time is 10 minutes** , the second patrol cycle should be from 9:10-10:10

Schedule mode: ☒ Daily
 ☐ Delete
 ☐ Clear all data
 Rest 22 hour workable

|   | Start time | End time | Next days |
|---|------------|----------|-----------|
| 1 | 08:00:00   | 08:59:59 |           |
| 2 | 09:10:00   | 10:09:59 |           |

<Schedule mode: Daily>

Add period of working

Start time: 10:20:00

Working time: 60 Minute

Time to rest: 10 Minute

☐ Not requested
 ☒ Specific personnel
 ☐ Team

Cycle times: 2

### (3) Add patrol personnel

- “Not requested” : If tick this , the patrol person in report result will refer to staff ID cards name.

Not requested

Specific personnel

Team

Add schedule

Basic information

Schedule name: Demo route \*

Start time: 18 August 2016

Allowable error: 0

Late error: 0

Daily

Weekly

Monthly

Every N days

<Schedule mode: Daily>

Add period of working

Start time: 10:20:00

Working time: 60 Minute

Time to rest: 10 Minute

Not requested

Specific personnel

Team

Cycle times: 2

Notice: If not assign a patrol personnel , will recognize person via staff card.

Add time

Save

Cancel

Time information

Schedule mode Daily


Delete

Clear all data

Rest 22 hour workable

|   | Start time | End time | Next days |
|---|------------|----------|-----------|
| 1 | 08:00:00   | 08:59:59 |           |
| 2 | 09:10:00   | 10:09:59 |           |

- **Specified personnel** : Can specify officer to assigned patrol period .

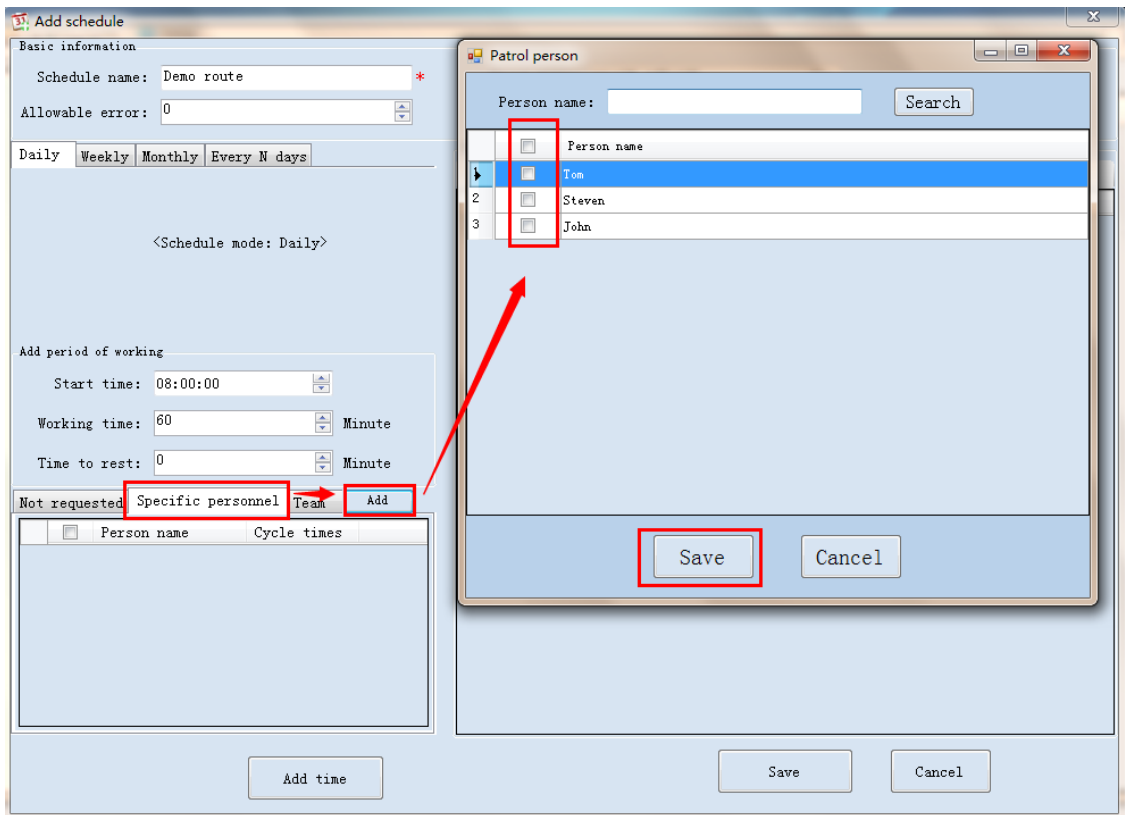

You can assign cycle time freely for every specified personnel . As below :

Tom : 2 times cycle

Steven : 3 times cycle

The schedule data will be with the order :

TOM ---TOM---STEVEN--- STEVEN--- STEVEN---

**Add schedule**

Basic information

Schedule name: Demo route \* Start time: 18 August 2016

Allowable error: 0 Late error: 0

Daily Weekly Monthly Every N days

<Schedule mode: Daily>

Add period of working

Start time: 17:00:00

Working time: 60 Minute

Time to rest: 0 Minute

Not requested Specific personnel Team Add

|    | Person name                                | Cycle times |        |
|----|--------------------------------------------|-------------|--------|
| 1/ | <input checked="" type="checkbox"/> Tom    | 2           | Delete |
| 2  | <input checked="" type="checkbox"/> Steven | 3           | Delete |

Time information

Schedule mode Daily ☒ Delete ☐ Clear all data Rest 19 hour workable

|   | Start time | End time | Specific personnel | Next days |
|---|------------|----------|--------------------|-----------|
| 1 | 08:00:00   | 08:59:59 | Tom                |           |
| 2 | 09:00:00   | 09:59:59 | Tom                |           |
| 3 | 10:00:00   | 10:59:59 | Steven             |           |
| 4 | 11:00:00   | 11:59:59 | Steven             |           |
| 5 | 12:00:00   | 12:59:59 | Steven             |           |

Add time Save Cancel


➤Team : Specify "team " for patrol schedule .

"Rest xx hours " means how many hours you can dominate for patrol period .


Time information

Schedule mode Daily ☒ Delete ☐ Clear all data Rest 12 hour workable

2. Edit schedule : Tick the schedule you want to edit , you can change the schedule name, start date , allowable error , Late error , delete some patrol period .

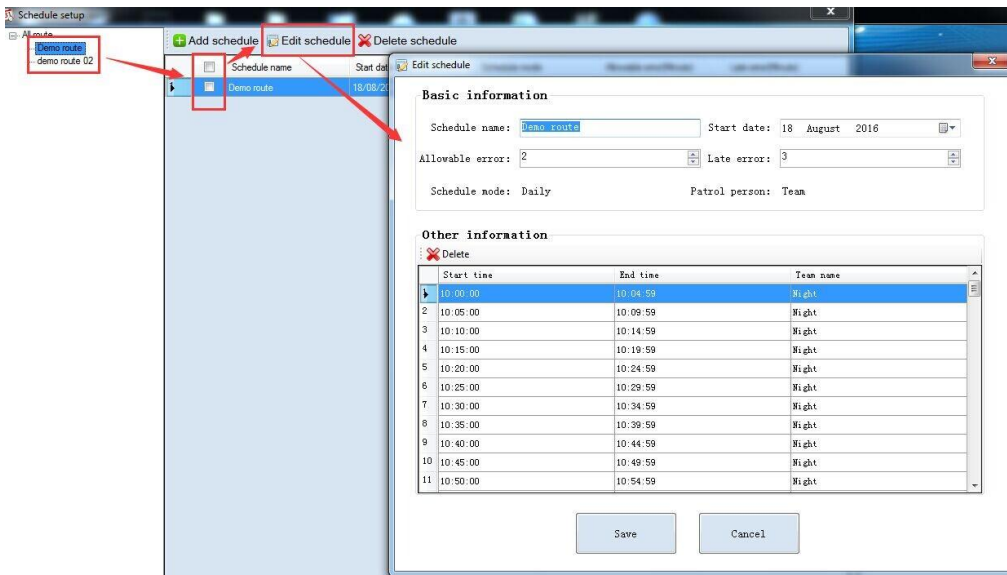

3 Delete schedule : Select schedule --- Click “delete schedule” .

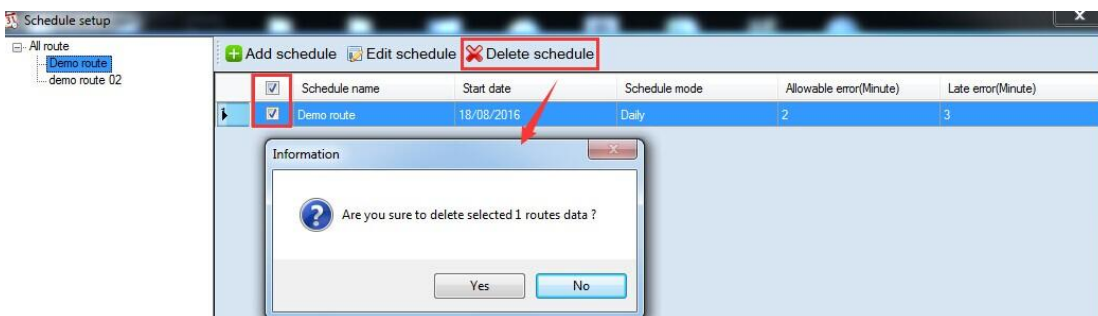

## 9. Report

### 9.1. Raw data

1.Add data get from patrol device will stored here . Once you connect device to software and clicked “ Read record ” from “data communication ”. Data will be kept into database .

So if data is not cleared from “raw data ,”you can find from here .

Query condition :

1. Start and End time : The smaller the query time range , the faster speed the data displayed .

2. Route selection : Because software without limit of patrol route , you can specify which route data you want to query.

3. Address and personnel : Once patrol routed is confirmed , you can specify which address card data under this patrol route and which patrol officer's data you want to query .

Raw Data

Search condition

1

Start time:  
2016-07-19 00:00:00

End time:  
2016-08-18 11:45:51

Route selection:  
Demo route

All

Address: 2

Hobby#00311C60

Meeting room#002DD5B5

All

Personnel: 4

admin#0FFFFFFF

Ton#00CD197F

Steven#002CF631

John#001E9768

2

Search

Data display

|   | Route Name | Address name | Card ID  | Patrol time         | Staff card ID | Person name | Device ID  |
|---|------------|--------------|----------|---------------------|---------------|-------------|------------|
| 1 | Demo route | Hobby        | 00311C60 | 2016-08-18 10:43:51 | 002CF631      | Steven      | 1511162112 |
| 2 | Demo route | Meeting room | 002DD5B5 | 2016-08-18 10:43:54 | 002CF631      | Steven      | 1511162112 |

2/2


Reading finished! Using time: 0.126s

Export Excel

Export PDF

4. Export PDF or Excel : You can click “Export Excel ” or Export PDF” to export data file .

37 / 64

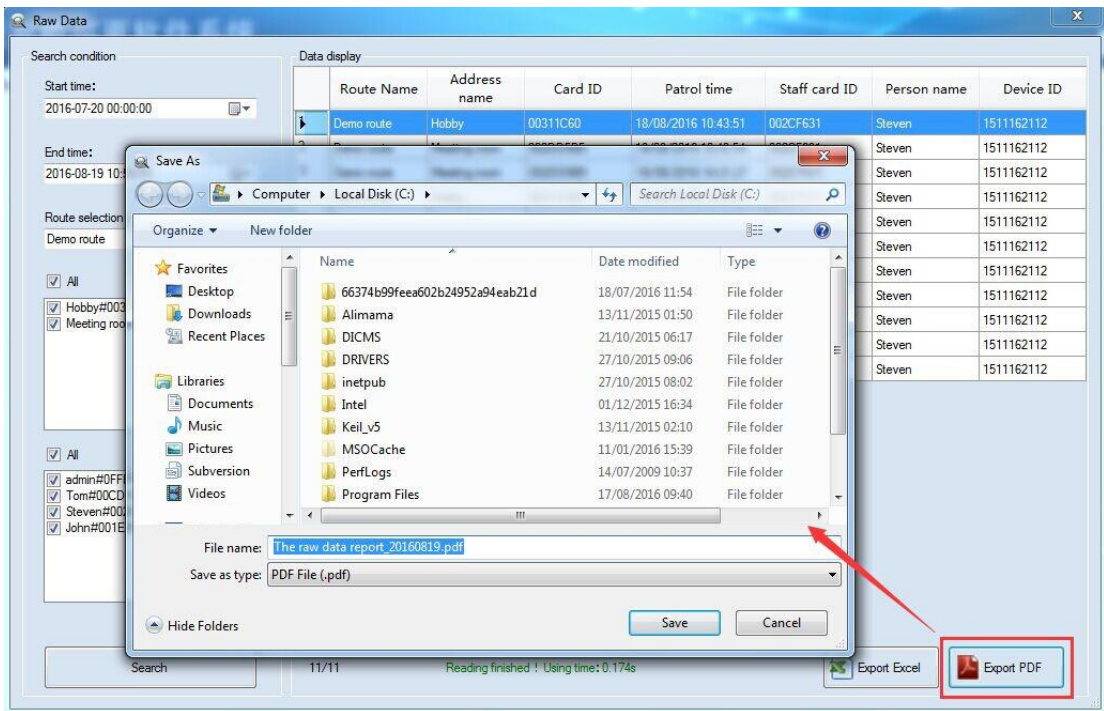

## 9.2. Data result (This report is for the patrol route with is set with schedule)

If you have create schedule for patrol route , “Data result ” can process data intelligently and show you result after comparing with the schedule you set . The result usually are “ Miss” “Qualified” “Late”.

Search condition

Start time:

2016-08-02 00:00:00

End time:

2016-09-02 14:23:34

Route selection:

Hotel

☒ All

Address: 5

☒ gate#00208549  
☒ meeting room#00205F88  
☒ lobby#0020357C  
☒ Resting room#002067BC  
☒ Emergency ext#002043E8

☒ All

Personnel: 4

☒ admin#0FFFFFFF  
☒ Tom#0020756C  
☒ Steven#000A0D38  
☒ Lou#00035120

☒ Qualified

☒ Late

☒ Miss

Search

Data display

| Route Name | Address name   | Start time          | End time            | Patrol time         | Scheduled person | Patrol person | Inspection results |
|------------|----------------|---------------------|---------------------|---------------------|------------------|---------------|--------------------|
| Hotel      | gate           | 2016-08-25 16:15:00 | 2016-08-25 16:16:59 | 25/08/2016 16:14:57 | Tom              | Tom           | Qualified          |
| Hotel      | meeting room   | 2016-08-25 16:15:00 | 2016-08-25 16:16:59 |                     | Tom              |               | Miss               |
| Hotel      | lobby          | 2016-08-25 16:15:00 | 2016-08-25 16:16:59 | 25/08/2016 16:14:58 | Tom              | Tom           | Qualified          |
| Hotel      | Resting room   | 2016-08-25 16:15:00 | 2016-08-25 16:16:59 |                     | Tom              |               | Miss               |
| Hotel      | Emergency exit | 2016-08-25 16:15:00 | 2016-08-25 16:16:59 | 25/08/2016 16:18:22 | Tom              | Steven        | Late               |
| Hotel      | gate           | 2016-08-25 16:17:00 | 2016-08-25 16:18:59 | 25/08/2016 16:20:11 | Tom              | Tom           | Late               |
| Hotel      | meeting room   | 2016-08-25 16:17:00 | 2016-08-25 16:18:59 |                     | Tom              |               | Miss               |
| Hotel      | lobby          | 2016-08-25 16:17:00 | 2016-08-25 16:18:59 | 25/08/2016 16:16:51 | Tom              | Tom           | Qualified          |
| Hotel      | Resting room   | 2016-08-25 16:17:00 | 2016-08-25 16:18:59 |                     | Tom              |               | Miss               |
| Hotel      | Emergency exit | 2016-08-25 16:17:00 | 2016-08-25 16:18:59 |                     | Tom              |               | Miss               |
| Hotel      | gate           | 2016-08-25 16:19:00 | 2016-08-25 16:20:59 |                     | Tom              |               | Miss               |
| Hotel      | meeting room   | 2016-08-25 16:19:00 | 2016-08-25 16:20:59 |                     | Tom              |               | Miss               |
| Hotel      | lobby          | 2016-08-25 16:19:00 | 2016-08-25 16:20:59 | 25/08/2016 16:20:14 | Tom              | Steven        | Qualified          |
| Hotel      | Resting room   | 2016-08-25 16:19:00 | 2016-08-25 16:20:59 |                     | Tom              |               | Miss               |
| Hotel      | Emergency exit | 2016-08-25 16:19:00 | 2016-08-25 16:20:59 |                     | Tom              |               | Miss               |
| Hotel      | gate           | 2016-08-25 16:21:00 | 2016-08-25 16:22:59 | 25/08/2016 16:23:31 | Tom              | Steven        | Qualified          |
| Hotel      | meeting room   | 2016-08-25 16:21:00 | 2016-08-25 16:22:59 |                     | Tom              |               | Miss               |

Reading finished!Using time: 4.021s

Total record: 160

Export Excel

Export PDF

Statistics:

Number of qualified: 6

Number of late: 2

Missing quantity: 152

Percent of qualified(%): 3.75%

Percent of late(%): 1.25%

Percent of missing (%): 95%

Notice : If there are multiple record during querying patrol period , system will just extract the earliest patrol time . If patrol person and scheduled person is the same one , the “Qualified ” result is in black color . If scheduled person and patrol person is not the same one , the “Qualified ” result will be in “Blue color ”.

Result judgement standard :

**Qualified** : If the patrol time is from 8:00-9:00 , the allowable error is 5 minutes , so the data at the time 07:55 to 09:05 will be judged as “Qualified ” .

**Late** : If the patrol time is from 8:00-9:00 , the late error is 10 minutes , so the data at the time 09:05 -09:10 will be judged as “late” .

**Miss** : The data beyond scheduled patrol time . If the schedule patrol time is 8:00-9:00, allowable error is 5 minutes , late error is 10 minutes , the data after time 09:10 will be judged as “Miss ”

➤ **Using time** : processing bar show data processing .Using time is the time-consuming for full data processing .

39 / 64

Reading finished! Using time: 0.246s Total record: 6

Export Excel Export PDF

Statistics:

- **Total record** : The count for all data display under your query condition
- **Statistics**: Count for “Qualified” “Late” “Miss” data under your query condition and their rate .

Data Result
✕

**Search condition**

Start time: 2016-07-19 00:00:00

End time: 2016-08-18 13:39:21

Route selection: Demo route

☒ All Address: 2

☒ Hobby#00311C60

☒ Meeting room#002005B5

☒ All Personnel: 4

☒ Admin#0FFFFFFF

☒ Tom#00CD197F

☒ Steven#002CF631

☒ John#001E9788

☒ Qualified ☒ Late ☒ Miss

Search

| Route Name | Address name | Start time          | End time            | Patrol time         | Scheduled person | Patrol person | Inspection results |
|------------|--------------|---------------------|---------------------|---------------------|------------------|---------------|--------------------|
| Demo route | Hobby        | 2016-08-18 10:00:00 | 2016-08-18 10:59:59 | 2016-08-18 10:43:51 | Admin            | Steven        | Qualified          |
| Demo route | Meeting room | 2016-08-18 10:00:00 | 2016-08-18 10:59:59 | 2016-08-18 10:43:54 | Admin            | Steven        | Qualified          |
| Demo route | Hobby        | 2016-08-18 11:00:00 | 2016-08-18 11:59:59 |                     | Admin            |               | Miss               |
| Demo route | Meeting room | 2016-08-18 11:00:00 | 2016-08-18 11:59:59 |                     | Admin            |               | Miss               |
| Demo route | Hobby        | 2016-08-18 12:00:00 | 2016-08-18 12:59:59 |                     | Admin            |               | Miss               |
| Demo route | Meeting room | 2016-08-18 12:00:00 | 2016-08-18 12:59:59 |                     | Admin            |               | Miss               |

Reading finished! Using time: 0.246s

Total record: 6

Export Excel Export PDF

**Statistics:**

Number of qualified: 2      Number of late: 0      Missing quantity: 4

Percent of qualified(%): 33.33%    Percent of late(%): 0%    Percent of missing (%): 66.67%

2. Export PDF and EXCEL : Click “Export Excel ” or “Export PDF” to export the data you want .



|            |              |                     |                     |       |      |
|------------|--------------|---------------------|---------------------|-------|------|
| Demo route | Meeting room | 2016-08-18 10:43:00 | 2016-08-18 10:43:59 | Night | Miss |
| Demo route | Hobby        | 2016-08-18 10:50:00 | 2016-08-18 10:54:59 | Night | Miss |
| Demo route |              |                     |                     | Night | Miss |
| Demo route |              |                     |                     | Night | Miss |
| Demo route |              |                     |                     | Night | Miss |
| Demo route |              |                     |                     | Night | Miss |
| Demo route |              |                     |                     | Night | Miss |
| Demo route |              |                     |                     | Night | Miss |
| Demo route |              |                     |                     | Night | Miss |
| Demo route | Hobby        | 2016-08-18 11:10:00 | 2016-08-18 11:14:59 | Night | Miss |

**Information**

?

Data query statements\_20160819File created , open it now?

Yes No

Reading finished ! Using time: 13.919s      Total record: 264

[Export Excel](#)   [Export PDF](#)

|    | A          | B            | C                   | D                   | E                   | F                | G             | H                  |
|----|------------|--------------|---------------------|---------------------|---------------------|------------------|---------------|--------------------|
| 2  | Route Name | Address name | Start time          | End time            | Patrol time         | Scheduled person | Patrol person | Inspection results |
| 3  | Demo route | Hobby        | 2016-08-18 10:00:00 | 2016-08-18 10:04:59 |                     | Night            |               | Miss               |
| 4  | Demo route | Meeting room | 2016-08-18 10:00:00 | 2016-08-18 10:04:59 |                     | Night            |               | Miss               |
| 5  | Demo route | Hobby        | 2016-08-18 10:05:00 | 2016-08-18 10:09:59 |                     | Night            |               | Miss               |
| 6  | Demo route | Meeting room | 2016-08-18 10:05:00 | 2016-08-18 10:09:59 |                     | Night            |               | Miss               |
| 7  | Demo route | Hobby        | 2016-08-18 10:10:00 | 2016-08-18 10:14:59 |                     | Night            |               | Miss               |
| 8  | Demo route | Meeting room | 2016-08-18 10:10:00 | 2016-08-18 10:14:59 |                     | Night            |               | Miss               |
| 9  | Demo route | Hobby        | 2016-08-18 10:15:00 | 2016-08-18 10:19:59 |                     | Night            |               | Miss               |
| 10 | Demo route | Meeting room | 2016-08-18 10:15:00 | 2016-08-18 10:19:59 |                     | Night            |               | Miss               |
| 11 | Demo route | Hobby        | 2016-08-18 10:20:00 | 2016-08-18 10:24:59 |                     | Night            |               | Miss               |
| 12 | Demo route | Meeting room | 2016-08-18 10:20:00 | 2016-08-18 10:24:59 |                     | Night            |               | Miss               |
| 13 | Demo route | Hobby        | 2016-08-18 10:25:00 | 2016-08-18 10:29:59 |                     | Night            |               | Miss               |
| 14 | Demo route | Meeting room | 2016-08-18 10:25:00 | 2016-08-18 10:29:59 |                     | Night            |               | Miss               |
| 15 | Demo route | Hobby        | 2016-08-18 10:30:00 | 2016-08-18 10:34:59 |                     | Night            |               | Miss               |
| 16 | Demo route | Meeting room | 2016-08-18 10:30:00 | 2016-08-18 10:34:59 |                     | Night            |               | Miss               |
| 17 | Demo route | Hobby        | 2016-08-18 10:35:00 | 2016-08-18 10:39:59 |                     | Night            |               | Miss               |
| 18 | Demo route | Meeting room | 2016-08-18 10:35:00 | 2016-08-18 10:39:59 |                     | Night            |               | Miss               |
| 19 | Demo route | Hobby        | 2016-08-18 10:40:00 | 2016-08-18 10:44:59 | 18/08/2016 10:43:51 | Night            | Steven        | Qualified          |
| 20 | Demo route | Meeting room | 2016-08-18 10:40:00 | 2016-08-18 10:44:59 | 18/08/2016 10:43:54 | Night            | Steven        | Qualified          |
| 21 | Demo route | Hobby        | 2016-08-18 10:45:00 | 2016-08-18 10:49:59 |                     | Night            |               | Miss               |
| 22 | Demo route | Meeting room | 2016-08-18 10:45:00 | 2016-08-18 10:49:59 |                     | Night            |               | Miss               |
| 23 | Demo route | Hobby        | 2016-08-18 10:50:00 | 2016-08-18 10:54:59 |                     | Night            |               | Miss               |
| 24 | Demo route | Meeting room | 2016-08-18 10:50:00 | 2016-08-18 10:54:59 |                     | Night            |               | Miss               |
| 25 | Demo route | Hobby        | 2016-08-18 10:55:00 | 2016-08-18 10:59:59 |                     | Night            |               | Miss               |
| 26 | Demo route | Meeting room | 2016-08-18 10:55:00 | 2016-08-18 10:59:59 |                     | Night            |               | Miss               |

Notice: If result show “NO DATA”, please check whether your query time is beyond your schedule .

Search condition

Start time:

2016-06-22 00:00:00

End time:

2016-07-22 00:00:00

Route:

demo2

☒ All

Address: 1

☒ dd#002E041A

☒ All

Personnel: 1

☒ admin#0FFFFFFF

☒ Qualified

☒ Late

☒ Miss

Search

Data display

| Route Name | Address name | Start time | End time | Patrol time | Scheduled person | Patrol person | Inspection results | Event info |
|------------|--------------|------------|----------|-------------|------------------|---------------|--------------------|------------|
| <NO DATA>  |              |            |          |             |                  |               |                    |            |

No data under this query condition !

Total record: 0

Export Excel

Export PDF

Statistics:

|                             |                        |                            |
|-----------------------------|------------------------|----------------------------|
| Number of qualified: 0      | Number of late: 0      | Missing quantity: 0        |
| Percent of qualified(%): 0% | Percent of late(%): 0% | Percent of missing (%): 0% |

Schedule setup

All route

demo route

Add schedule

Edit schedule

Delete schedule

|  | Schedule name | Start date | Schedule mode | Allowable error (Minute) | Late error (Minute) |
|--|---------------|------------|---------------|--------------------------|---------------------|
|  | demo route    | 2016-08-18 | Daily         | 0                        | 0                   |

### 9.3. Data count (This report if for non-scheduled data )

If no patrol schedule set for patrol route , the data result under your query condition will show here and ranking with check point order .

There are 4 types report available (Displayed “by address”, “By date”, “By address & staff” and “By staff & date”).

**A. Report by address:** Report result are listed with address order

|    | Card ID  | Address name | Patrol time | Patrol time                                  | Count |
|----|----------|--------------|-------------|----------------------------------------------|-------|
| 60 | 00CD197F | 3F           | 2016-12-10  |                                              | 0     |
| 61 | 002E041A | 1F           | 2016-12-11  |                                              | 0     |
| 62 | 0077FB27 | 2F           | 2016-12-11  |                                              | 0     |
| 63 | 00CD197F | 3F           | 2016-12-11  |                                              | 0     |
| 64 | 002E041A | 1F           | 2016-12-12  | 09:55:07                                     | 1     |
| 65 | 0077FB27 | 2F           | 2016-12-12  | 09:55:14                                     | 1     |
| 66 | 00CD197F | 3F           | 2016-12-12  | 09:55:12 09:55:19                            | 2     |
| 67 | 002E041A | 1F           | 2016-12-13  | 15:32:05 15:32:09 15:32:12 15:32:23 15:32:27 | 5     |
| 68 | 0077FB27 | 2F           | 2016-12-13  |                                              | 0     |
| 69 | 00CD197F | 3F           | 2016-12-13  |                                              | 0     |
| 70 | 002E041A | 1F           | 2016-12-14  |                                              | 0     |
| 71 | 0077FB27 | 2F           | 2016-12-14  |                                              | 0     |
| 72 | 00CD197F | 3F           | 2016-12-14  |                                              | 0     |
| 73 | 002E041A | 1F           | 2016-12-15  |                                              | 0     |
| 74 | 0077FB27 | 2F           | 2016-12-15  |                                              | 0     |
| 75 | 00CD197F | 3F           | 2016-12-15  |                                              | 0     |
| 76 | 002E041A | 1F           | 2016-12-16  |                                              | 0     |
| 77 | 0077FB27 | 2F           | 2016-12-16  |                                              | 0     |
| 78 | 00CD197F | 3F           | 2016-12-16  |                                              | 0     |
| 79 | 002E041A | 1F           | 2016-12-17  |                                              | 0     |
| 80 | 0077FB27 | 2F           | 2016-12-17  |                                              | 0     |

**B. Report by date :** Report result are listed with date order

|    | Patrol time | Card ID  | Address name | Patrol time                                  | Count |
|----|-------------|----------|--------------|----------------------------------------------|-------|
| 60 |             | 00CD197F | 3F           |                                              | 0     |
| 61 | 2016-12-11  | 002E041A | 1F           |                                              | 0     |
| 62 |             | 0077FB27 | 2F           |                                              | 0     |
| 63 |             | 00CD197F | 3F           |                                              | 0     |
| 64 | 2016-12-12  | 002E041A | 1F           | 09:55:07                                     | 1     |
| 65 |             | 0077FB27 | 2F           | 09:55:14                                     | 1     |
| 66 |             | 00CD197F | 3F           | 09:55:12 09:55:19                            | 2     |
| 67 | 2016-12-13  | 002E041A | 1F           | 15:32:05 15:32:09 15:32:12 15:32:23 15:32:27 | 5     |
| 68 |             | 0077FB27 | 2F           |                                              | 0     |
| 69 |             | 00CD197F | 3F           |                                              | 0     |
| 70 | 2016-12-14  | 002E041A | 1F           |                                              | 0     |
| 71 |             | 0077FB27 | 2F           |                                              | 0     |
| 72 |             | 00CD197F | 3F           |                                              | 0     |
| 73 | 2016-12-15  | 002E041A | 1F           |                                              | 0     |
| 74 |             | 0077FB27 | 2F           |                                              | 0     |
| 75 |             | 00CD197F | 3F           |                                              | 0     |
| 76 | 2016-12-16  | 002E041A | 1F           |                                              | 0     |
| 77 |             | 0077FB27 | 2F           |                                              | 0     |
| 78 |             | 00CD197F | 3F           |                                              | 0     |
| 79 | 2016-12-17  | 002E041A | 1F           |                                              | 0     |
| 80 |             | 0077FB27 | 2F           |                                              | 0     |
| 81 |             | 00CD197F | 3F           |                                              | 0     |

C. **Report by address &staff** : Report result are listed with address and all staff listing order

Data Count

Search condition

Start time: 2016-11-21 00:00:00

End time: 2016-12-21 18:51:00

Route selection: Demo

☒ All Address: 3

☒ 1F#002E041A  
☒ 2F#0077FB27  
☒ 3F#00CD197F

☒ All Personnel: 7

☒ admin#0FFFFFFF  
☒ Lynn#12545454  
☒ Lisa#33233344  
☒ Tom#12345555  
☒ LULU#33444444  
☒ nana#AA311222  
☒ Sam#23334444

Search

By address By date By address&staff By staff&date

| Card ID | Address name | Patrol person | Patrol time | Patrol time                                  | Count |
|---------|--------------|---------------|-------------|----------------------------------------------|-------|
| 447     | 0077FB27 2F  | nana          | 2016-12-12  |                                              | 0     |
| 448     |              | Sam           | 2016-12-12  |                                              | 0     |
| 449     |              | admin         | 2016-12-12  | 09:55:14                                     | 1     |
| 450     |              | Lynn          | 2016-12-12  |                                              | 0     |
| 451     |              | Lisa          | 2016-12-12  |                                              | 0     |
| 452     |              | Tom           | 2016-12-12  |                                              | 0     |
| 453     | 00CD197F 3F  | LULU          | 2016-12-12  |                                              | 0     |
| 454     |              | nana          | 2016-12-12  |                                              | 0     |
| 455     |              | Sam           | 2016-12-12  |                                              | 0     |
| 456     |              | admin         | 2016-12-12  | 09:55:12 09:55:19                            | 2     |
| 457     |              | Lynn          | 2016-12-12  |                                              | 0     |
| 458     |              | Lisa          | 2016-12-12  |                                              | 0     |
| 459     | 002E041A 1F  | Tom           | 2016-12-12  |                                              | 0     |
| 460     |              | LULU          | 2016-12-12  |                                              | 0     |
| 461     |              | nana          | 2016-12-12  |                                              | 0     |
| 462     |              | Sam           | 2016-12-12  |                                              | 0     |
| 463     |              | admin         | 2016-12-13  | 15:32:05 15:32:09 15:32:12 15:32:23 15:32:27 | 5     |
| 464     |              | Lynn          | 2016-12-13  |                                              | 0     |
| 465     |              | Lisa          | 2016-12-13  |                                              | 0     |
| 466     |              | Tom           | 2016-12-13  |                                              | 0     |
| 467     |              | LULU          | 2016-12-13  |                                              | 0     |

Reading finished!Using time: 1.209s

Total record: 651

Export Excel Export PDF

D. **Report by address &date** : Report result are listed with address and all staff listing order

Data Count

Search condition

Start time: 2016-11-21 00:00:00

End time: 2016-12-21 18:51:00

Route selection: Demo

☒ All Address: 3

☒ 1F#002E041A  
☒ 2F#0077FB27  
☒ 3F#00CD197F

☒ All Personnel: 7

☒ admin#0FFFFFFF  
☒ Lynn#12545454  
☒ Lisa#33233344  
☒ Tom#12345555  
☒ LULU#33444444  
☒ nana#AA311222  
☒ Sam#23334444

Search

By address By date By address&staff By staff&date

| Patrol time | Patrol person | Card ID  | Address name | Patrol time       | Count |
|-------------|---------------|----------|--------------|-------------------|-------|
| 438         | Sam           | 00CD197F | 3F           |                   | 0     |
| 439         |               | 002E041A | 1F           |                   | 0     |
| 440         |               | 0077FB27 | 2F           |                   | 0     |
| 441         |               | 00CD197F | 3F           |                   | 0     |
| 442         | admin         | 002E041A | 1F           | 09:55:07          | 1     |
| 443         |               | 0077FB27 | 2F           | 09:55:14          | 1     |
| 444         |               | 00CD197F | 3F           | 09:55:12 09:55:19 | 2     |
| 445         |               | 002E041A | 1F           |                   | 0     |
| 446         | Lynn          | 0077FB27 | 2F           |                   | 0     |
| 447         |               | 00CD197F | 3F           |                   | 0     |
| 448         |               | 002E041A | 1F           |                   | 0     |
| 449         |               | 0077FB27 | 2F           |                   | 0     |
| 450         | Lisa          | 00CD197F | 3F           |                   | 0     |
| 451         |               | 002E041A | 1F           |                   | 0     |
| 452         |               | 0077FB27 | 2F           |                   | 0     |
| 453         |               | 00CD197F | 3F           |                   | 0     |
| 454         | Tom           | 002E041A | 1F           |                   | 0     |
| 455         |               | 0077FB27 | 2F           |                   | 0     |
| 456         |               | 00CD197F | 3F           |                   | 0     |
| 457         |               | 002E041A | 1F           |                   | 0     |
| 458         | LULU          | 0077FB27 | 2F           |                   | 0     |
| 459         |               | 00CD197F | 3F           |                   | 0     |

Reading finished!Using time: 1.198s


Total record: 651

Export Excel Export PDF

Error time: The patrol time result error . If multiple record of the same day , same place within the error time , will be counted once only . If “error time” is 0, all recorded data in device of scheduled check point will all displayed here .

The first time appear on the time list will be regarded as the first time , 5 minutes error is based on the first time one, till the second valid time listed out, 5 minutes error superposed again , till the third time...

For example , if the “error time ” is 5 minutes , the first reading time recorded is 10:01, so the time within 10:01-10:06 will be ignored till the next data appear which beyond time 10:06, below picture time is 10:10, if data within 10:10-10:05, will be ignored and only 10:10 left , till the next data time 10:30 appeared , if data within 10:30-10:35, will be ignored and only 10:30 left ,till the next piece of data time 10:50 appeared .

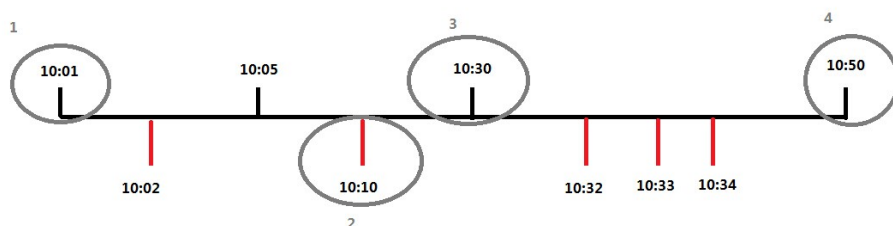

Data Count

Search condition

Start time: 2016-11-23 00:00:00

End time: 2016-12-23 16:01:26

Route: demo

☒ All Address: 2

☒ 1F#002E041A

☒ 2F#0077FB27

Search

By address By date By address&staff By staff&date

|    | Card ID  | Address name | Patrol time | Patrol time                                                    | Count |
|----|----------|--------------|-------------|----------------------------------------------------------------|-------|
| 43 | 002E041A | 1F           | 2016-12-14  |                                                                | 0     |
| 44 | 0077FB27 | 2F           | 2016-12-14  |                                                                | 0     |
| 45 | 002E041A | 1F           | 2016-12-15  |                                                                | 0     |
| 46 | 0077FB27 | 2F           | 2016-12-15  |                                                                | 0     |
| 47 | 002E041A | 1F           | 2016-12-16  |                                                                | 0     |
| 48 | 0077FB27 | 2F           | 2016-12-16  |                                                                | 0     |
| 49 | 002E041A | 1F           | 2016-12-17  |                                                                | 0     |
| 50 | 0077FB27 | 2F           | 2016-12-17  |                                                                | 0     |
| 51 | 002E041A | 1F           | 2016-12-18  |                                                                | 0     |
| 52 | 0077FB27 | 2F           | 2016-12-18  |                                                                | 0     |
| 53 | 002E041A | 1F           | 2016-12-19  |                                                                | 0     |
| 54 | 0077FB27 | 2F           | 2016-12-19  |                                                                | 0     |
| 55 | 002E041A | 1F           | 2016-12-20  |                                                                | 0     |
| 56 | 0077FB27 | 2F           | 2016-12-20  |                                                                | 0     |
| 57 | 002E041A | 1F           | 2016-12-21  | 13:46:24 14:37:02 14:37:41 14:38:04 14:38:34 14:38:47 14:47:05 | 7     |
| 58 | 0077FB27 | 2F           | 2016-12-21  | 13:46:35                                                       | 1     |
| 59 | 002E041A | 1F           | 2016-12-22  |                                                                | 0     |
| 60 | 0077FB27 | 2F           | 2016-12-22  |                                                                | 0     |
| 61 | 002E041A | 1F           | 2016-12-23  | 15:48:51 15:53:34 15:53:53 15:55:37                            | 4     |
| 62 | 0077FB27 | 2F           | 2016-12-23  | 15:55:54                                                       | 1     |


Reading finished!Total time: 1.34s

Total record: 62

Export Excel Export PDF

2. Export PDF and Excel : You can click “Export Excel” or Export PDF ” to save these file to your computer .

## 9.4 Data Analysis

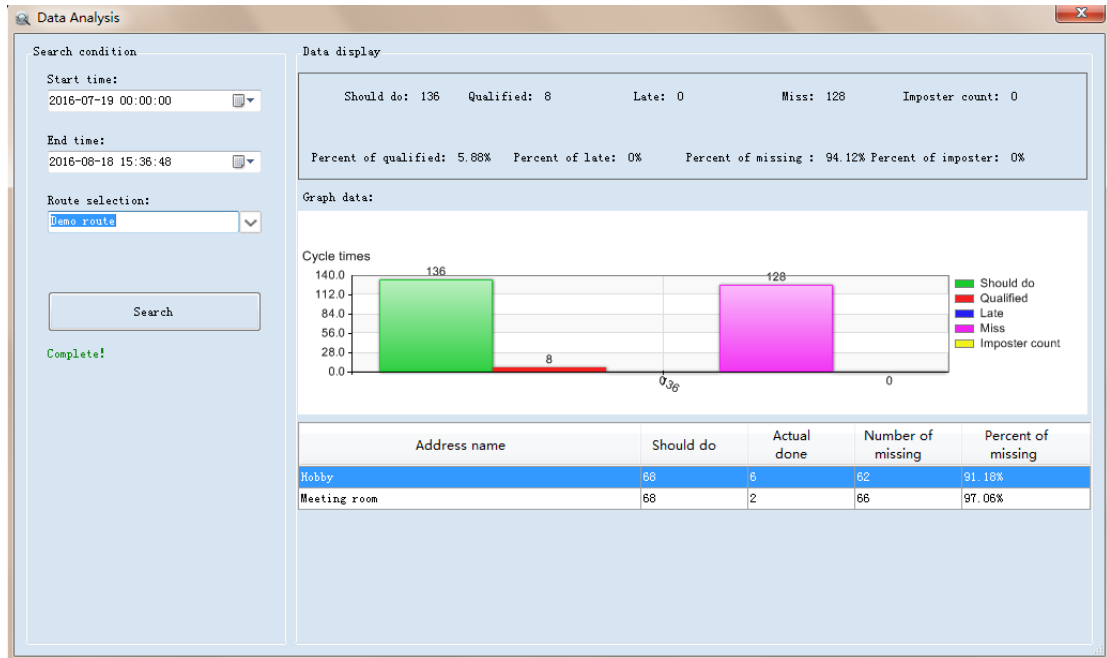

Query the data statistics chart as your time condition

1. Full in the search condition and click "Search" to query the result .As below picture

**Should do :** The patrol quantity should to do , this is calculated based on generated patrol schedule

**Actual done:** The actually patrol did ("Qualified data ") or also "Qualified data " and "Late data" (if "late error ") . **If multiple data existed at the same patrol period for the same location, will be counted once only .**

**Qualified :** "Qualified data " at the scheduled patrol period ( these data result are the same as in "Data result "report ) .

**Late :** "Late data " at the scheduled patrol period . ( these data result are the same as in "Data result "report ) .

**Miss :** "Miss data " at the scheduled patrol period .( these data result are the same as in "Data result "report ) .

**Imposter count :** Result calculate for the "imposter data" .

## 9.5 Impact record

You can query the impact record data stored in the patrol device under your query date condition. The data displayed here are the same as the one under “Data communication”- “Impact record” .

Please note the search date selection ,if no impact record generated under your search date condition, there will be nothing displayed here .

Impact record

Search condition

Start time:  
2016-06-01 00:00:00

End time:  
2016-06-18 16:30:32

Route selection:  
Demo route

Search


Data display

|   | Route Name | Device ID  | Type number | Impact time         |
|---|------------|------------|-------------|---------------------|
| 1 | Demo route | 1511162112 | 10407       | 2016-06-28 15:48:21 |
| 2 | Demo route | 1511162112 | 10407       | 2016-06-28 15:48:24 |
| 3 | Demo route | 1511162112 | 10407       | 2016-06-28 15:48:32 |
| 4 | Demo route | 1511162112 | 10407       | 2016-07-06 11:53:57 |
| 5 | Demo route | 1511162112 | 10407       | 2016-07-06 11:54:01 |
| 6 | Demo route | 1511162112 | 10407       | 2016-07-14 10:40:30 |

Counts: 20 page 1 Total 1 Pages, Total 6 pcs

Export Excel

Export PDF

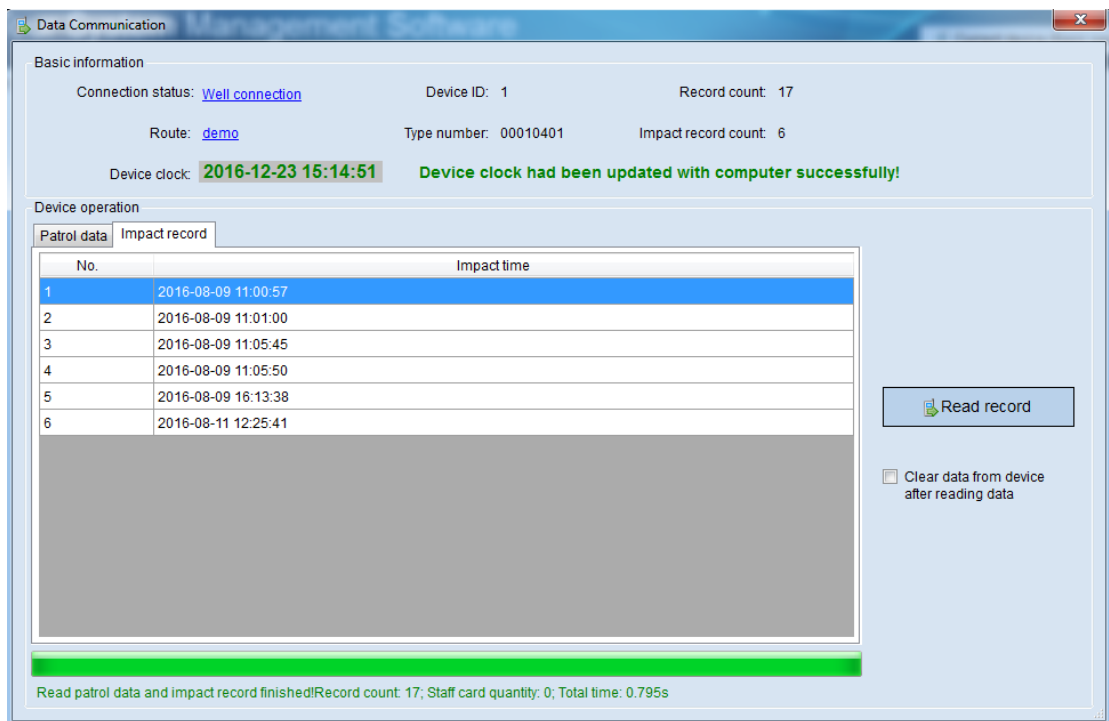

## 9.6 Data count report

Can count the patrol lasting time of each round .



## 9.7 Auto-email

The screenshot shows a window titled 'Auto-email' with a close button (X) in the top right corner. Inside the window, there are two tabs: 'Mailbox Setup' and 'Push settings'. The 'Mailbox Setup' tab is active, displaying the 'E-mail configuration' section. This section contains several input fields: 'Send to:' with the value 'emailaddress@hotmail.com', 'Send from:' with the value 'email@gmail.com', 'Email password:' with a masked password '.....', 'SMTP server:' with the value 'smtp.gmail.com', and 'Port:' with a dropdown menu showing '465'. A red box highlights the 'Send to:', 'Send from:', 'Email password:', 'SMTP server:', and 'Port:' fields. A red arrow points from the 'Add' button at the bottom left to the 'SMTP server:' field. Another red arrow points from the 'Save' button at the bottom right to the 'Port:' dropdown. Below the input fields, there is a 'Tips' section with text: 'Tips: If account or password authentication failed, please login your current email address and go to "Setup Account" to test whether "SMTP" service is run, if there is authorization code, please use it as password!'. At the bottom of the window, there are four buttons: 'Add', 'Remove', 'Edit', and 'Save'. The 'Add' and 'Save' buttons are highlighted with red boxes.

Auto-email

Mailbox Setup Push settings

**E-mail configuration**

Send to: emailaddress@hotmail.com

Send from: email@gmail.com

Email password: .....

SMTP server: smtp.gmail.com Port: 465

Tips: If account or password authentication failed, please login your current email address and go to "Setup Account" to test whether "SMTP" service is run, if there is authorization code, please use it as password!

Add Remove Edit Save Cancel

Click “add” --- input email address of “send to” and “send from” and sender’s password --- input “SMTP server” and “Port” of sender’s email address (you can check SMTP server info under settings after login your email and find “Configure your email client”, below is example of Gmail ).

## Step 2: Change your IMAP settings in your email client

Use the table below to update your client with the correct information. For help updating your settings, search your email client's Help Center for instructions on setting up IMAP.

|                                           |                                                                                                                                                            |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Incoming Mail (IMAP) Server               | imap.gmail.com<br>Requires SSL: Yes<br>Port: 993                                                                                                           |
| Outgoing Mail (SMTP) Server               | smtp.gmail.com<br>Requires SSL: Yes<br>Requires TLS: Yes (if available)<br>Requires Authentication: Yes<br>Port for SSL: 465<br>Port for TLS/STARTTLS: 587 |
| Full Name or Display Name                 | Your name                                                                                                                                                  |
| Account Name, User name, or Email address | Your full email address                                                                                                                                    |
| Password                                  | Your Gmail password                                                                                                                                        |

 Auto-email ✕

sales@zyactech.com

Add Remove

Mailbox Setup Push settings

### E-mail configuration

Send to:

Send from:

Email password:

SMTP server: tp.exmail.qq.com

Port: 465

Information

✕

 OK!

OK


Tips: If account or password authentication failed, please login your current email address and go to "Setup-Account" to test whether "SMTP" service is run, if there is authorization code, please use it as password!

Edit Save Cancel

Once auto-email address created successfully, software will send an service opening email to your receivers email

here input .

If you see error prompt “ please check whether the account and password are correct !” during your operation, please back to “mailbox setup” to check as following:

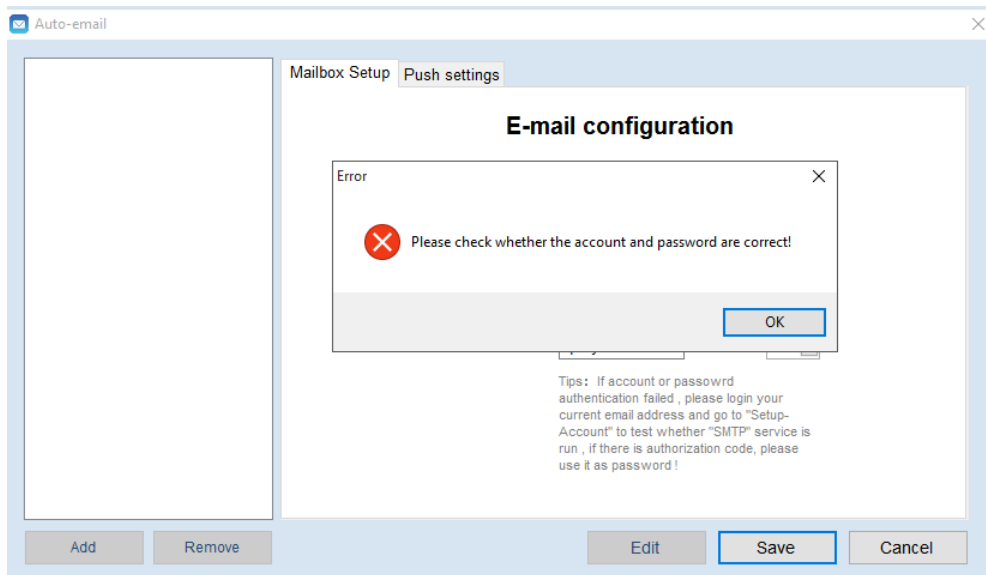

1. Whether email password correct
  2. Whether SMTP and Port input correctly , and whether SMTP service running under your email service account .
- If all correct after your checking , please click “ Save ”, if shows ok means email is successfully created, then you can go to “Push settings ” to continue email contents settings .

Mailbox Setup Push settings

### E-mail configuration

Send to

Send from

Email password

SMTP server:

Port:

Information

OK!

OK

Tips: If account or password authentication failed, please login your current email address and go to "Setup-Account" to test whether "SMTP" service is run, if there is authorization code, please use it as password!

Edit

Save

Cancel

Auto-email

Mailbox Setup Push settings

|                                     | Route      |
|-------------------------------------|------------|
| <input checked="" type="checkbox"/> | D1         |
| 2 <input type="checkbox"/>          | D2         |
| 3 <input type="checkbox"/>          | D3         |
| 4 <input type="checkbox"/>          | D4         |
| 5 <input type="checkbox"/>          | 6200F test |
| 6 <input type="checkbox"/>          | D5         |

Auto-send: ☒ Open

Auto-report: ☒ Route summary

Schedule mode: ☐ Daily ☒ Weekly ☐ Monthly

Email time:

Error

Please select the route information!

OK


Add

Remove


Edit

Save

Cancel

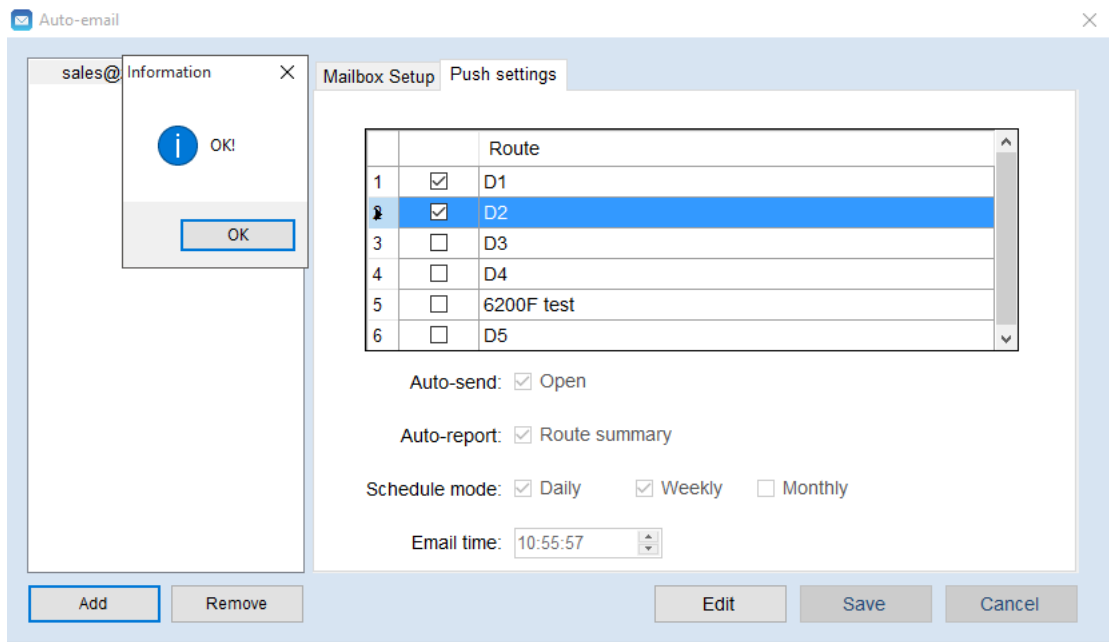

If you see error again “please check whether the account and password are correct ”, the handing method is same as above .

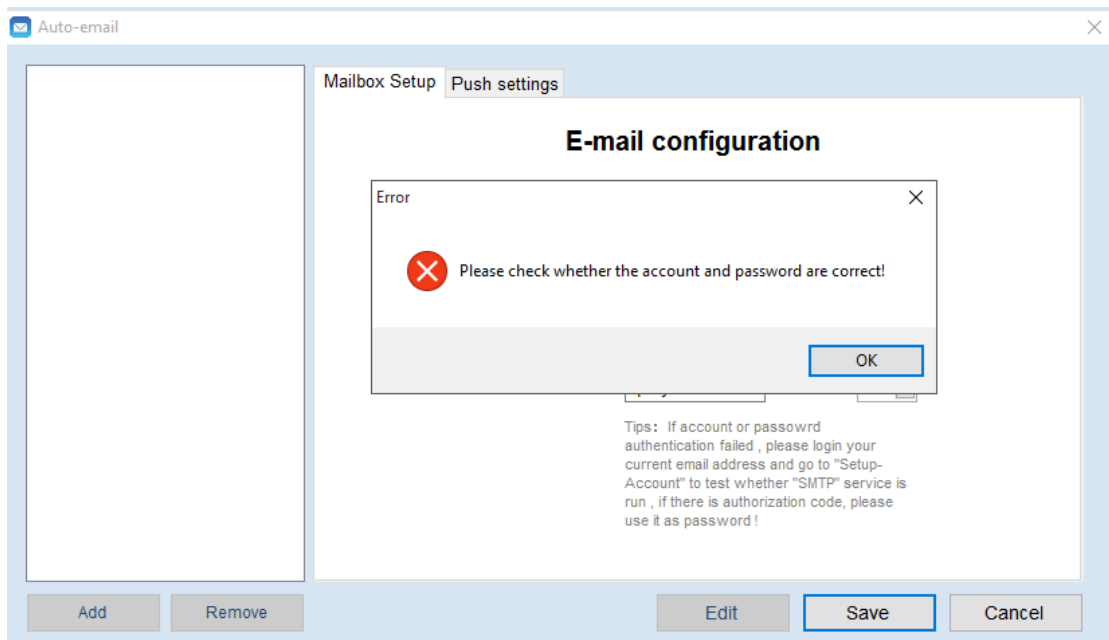

If you see error prompt “ please check whether the account and password are correct !” during your operation, please back to “mailbox setup” to check 3 places

1. Whether email password correct

2. Whether SMTP and Port input correctly , and whether SMTP service running under your email service account .

If all correct after your checking , please click “ Save ” , if shows “ ok” means email is successfully created, then you can go to “Push settings ” to continue email contents settings , click “Edit” first, and tick your settings . Then click “Save”. If push settings is settled successfully , you will see “Ok” message , at the same time , your assigned receiver’s email will receive an auto-email to tell you the auto-email function is successfully started .

Mailbox Setup Push settings

### E-mail configuration

Send to

Send from

Email password

SMTP server: tp.exmail.qq.com Port: 465

Information OK!

OK

Tips: If account or password authentication failed, please login your current email address and go to "Setup-Account" to test whether "SMTP" service is run, if there is authorization code, please use it as password!

Edit Save Cancel

X

Mailbox Setup Push settings ①

|   |                                     | Route        |
|---|-------------------------------------|--------------|
| 1 | <input checked="" type="checkbox"/> | D1           |
| 2 | <input type="checkbox"/>            | D2           |
| 3 | <input type="checkbox"/>            | D3           |
| 4 | <input type="checkbox"/>            | D4           |
| 5 | <input type="checkbox"/>            | 6200F test ③ |
| 6 | <input type="checkbox"/>            | D5           |

Auto-send: ☒ Open  
 Auto-report: ☒ Route summary  
 Schedule mode: ☐ Daily ☒ Weekly ☐ Monthly  
 Email time: 11:02:43

Edit ② Save ④ Cancel

## 10. System tools

### 10.1 User setup

There are 3 types user can be created : Super administrator , Administrator , General users


--Select--
▼

--Select--
▼

General users  
 Administrators  
 Super administrator

You can Create new user, Edit or delete user , Query use with user name or user type .

1. Query : Type user name or select user type to find result

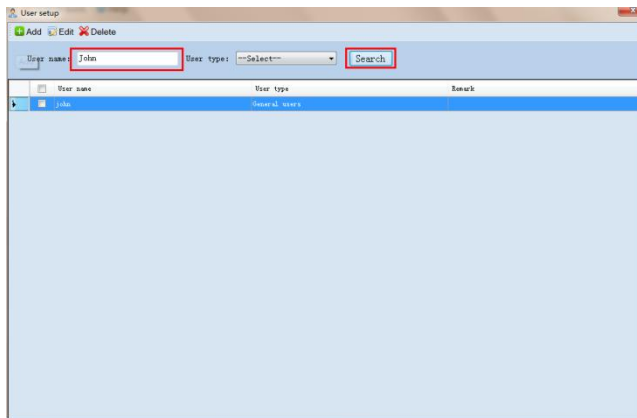

## 2. Add user

### ■ User type explanation

3 types user : Super administrator (**Admin** , default by system ) , Administrator , General user.

**Super administrator** : There is only one Super administrator allowed in this system , its "**Admin**". It with all permission for software .

**Administrator ,General user** : No much permission difference just Administrator can create "Administrator " and "General User " . General user can only create "General user " .


### Notice :

- (1) When creating new user , can only create General user or Administrator user .
- (2) **Admin** is the system default user account .
- (3) Default password is "123", suggest you to change **Admin** password timely .

(1.) Fill in basic user information (User name , password , user type and operation permission for software .


There are 2 types user can be created "Administrator " or "General users" . The difference of General user and Administrator is Administrator can create "Administrator " and "General User " . General user can only create "General user " .

There is only one "Super administrator " allowed , the system default one, can only change the password , and change the operation permission. This account is can't be deleted or change name and user type. "Super administrator " with the highest permission to set all account .

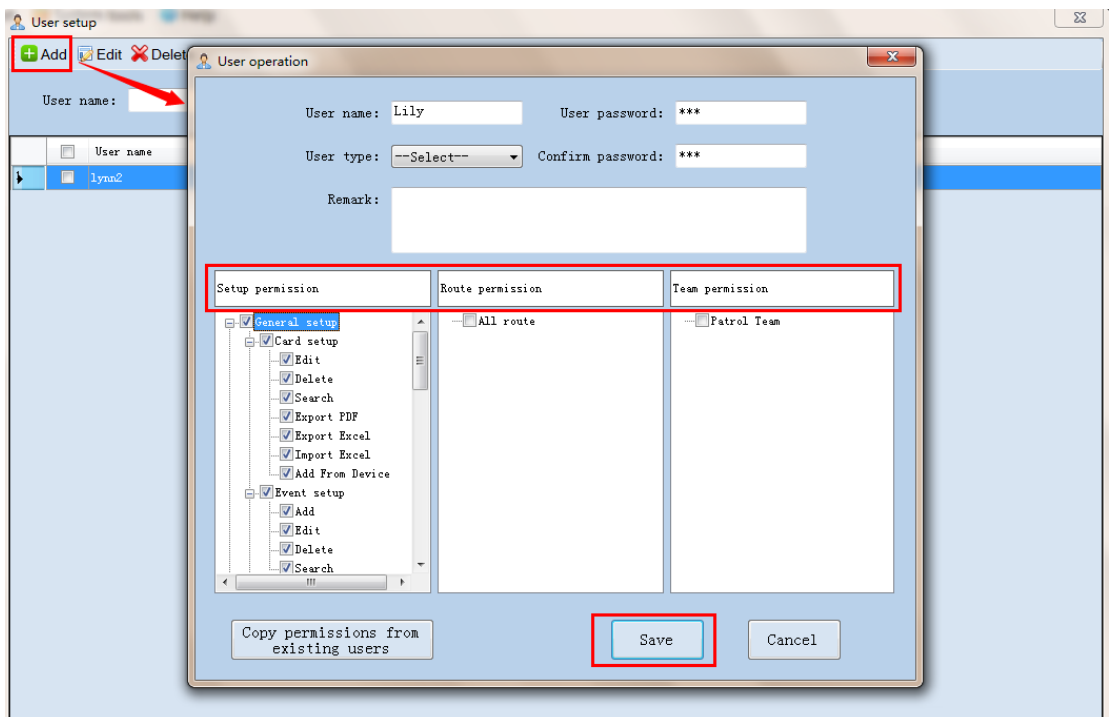


#### ■ Operation permission

Three main operation permission : Setup permission , Route permission, Team permission .As below picture

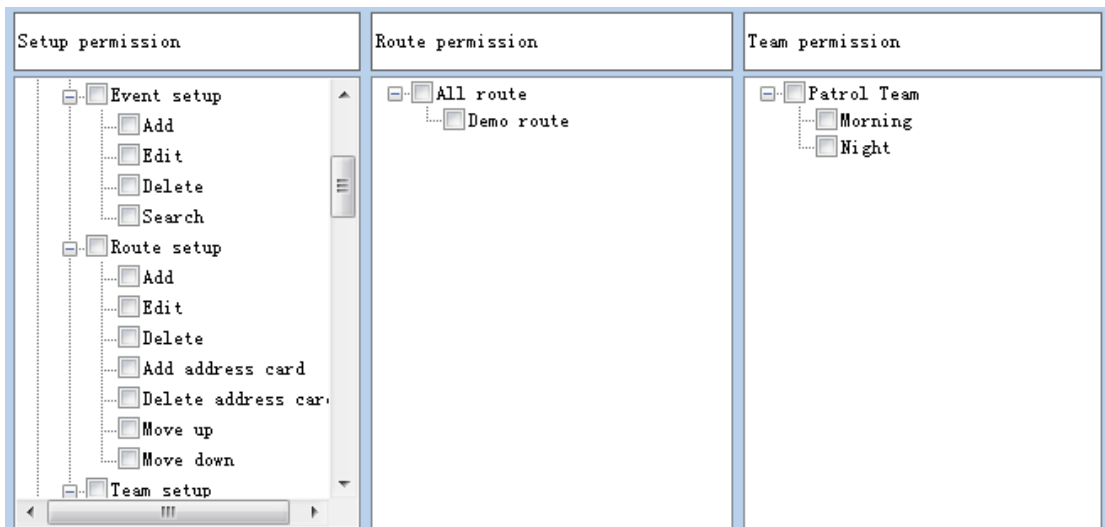

If not tick the permission option for specified , when the user log in system with his account and operate the related interface , system with show message “ You have no permissions for xx operation ! ”. As below picture :

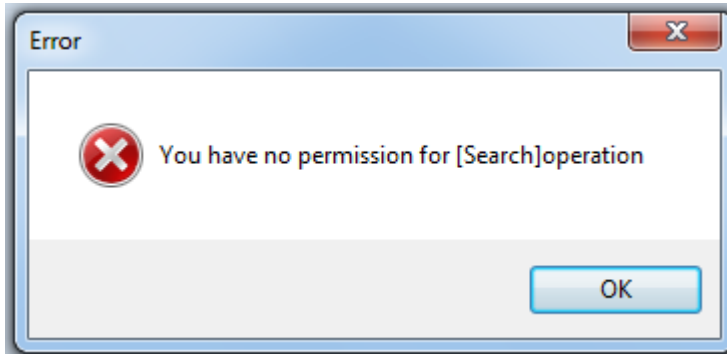

■ Authorization explain

- ◆ All user (**Admin** not included ) permission are authorized by who created them ;
- ◆ The creator's authorization permission can't beyond what themselves with;

A . For example : Sam with below permission , so the user created by Sam can only with the permission not beyond what Sam with .

As below picture, Sam is without “ Route permission ”, so the user created by Sam should also without this permission .



Notice : The permission the creator must have is “ User setup (Add) ” .

User operation

User name:  User password:

User type:  Confirm password:

Remark:

| Setup permission                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Route permission                                                                                                              | Team permission                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| <input checked="" type="checkbox"/> System tools <ul style="list-style-type: none"> <li><input type="checkbox"/> User setup               <ul style="list-style-type: none"> <li><input type="checkbox"/> Add</li> <li><input type="checkbox"/> Edit</li> <li><input type="checkbox"/> Delete</li> <li><input type="checkbox"/> Search</li> </ul> </li> <li><input checked="" type="checkbox"/> System resetting</li> <li><input checked="" type="checkbox"/> OK</li> </ul> | <input checked="" type="checkbox"/> All route <ul style="list-style-type: none"> <li><input type="checkbox"/> demo</li> </ul> | <input checked="" type="checkbox"/> Patrol Team |

B. User type can be created : If Sam is “ Administrator ” , he can create a new user with type “Administrator” or “General User” . If Sam is “General User”, he can only create “General User ” also ,can not beyond Sam’s type .

◆ Creator can query , edit and delete the user information which created by them . If not create user, they can only see themselves information .

◆ User can not extend their operation permission only if apply to the creator who created them .

For example , if user “Sam” is created by “Devin”, Sam can only extend his operation permission by applying to Devin.

## 10.2 System resetting

Select the part should be reset , click “OK” to clear information from software (Select you to choose “ Clear parts”

to select what you want to delete. Please backup data before resetting , or data will not recovered again).

System resetting

Type:

☐ Clear all Settings

☒ Clear parts (recommended)

Options:

☒ Patrol team

☐ Patrol route

☐ Device list

☒ Address list

☐ Staff list

☐ Event card list

☒ Event list

☐ Patrol schedule

☐ Raw data

Notice: Please backup software setting first before resetting!

OK

Cancel

10.3. Company information

Company name : Company name , this will be shown as report title

Company abbreviation : Fill in according to actual demand

Company profile : Fill in according to actual demand

Company LOGO: Background of software logo

Company information

Company name:

Patrol System

Company abbreviation:

Patrol System

Company profile:


Patrol System

Company LOGO:


Save

Cancel

## 10.4. Data backup

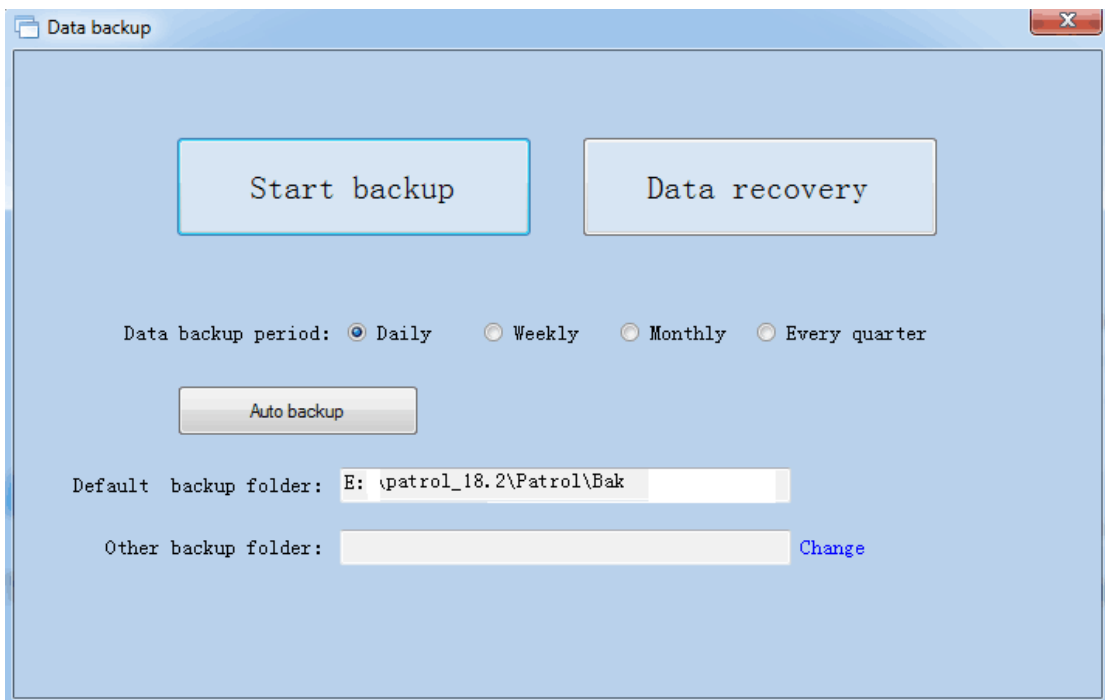

- Start backup: Backup the current software database to your specified path

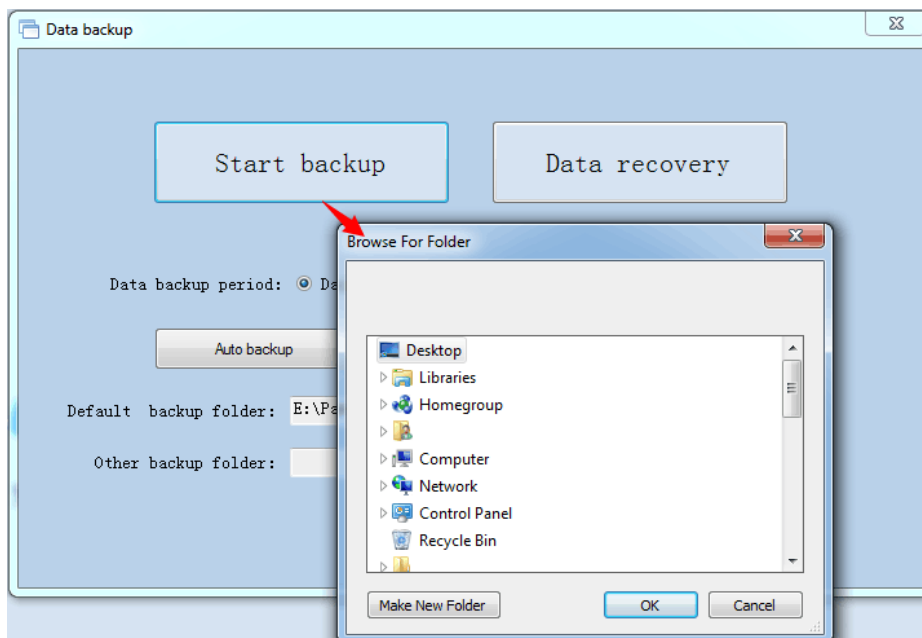

- Data recovery: You can recover any existed backup from your storage path (Including all software setting , data stored in previous database).
- Data backup period: There are 4 types backup period “Daily” “Weekly” “Monthly” “Every quarter” Once click “Auto backup”, software will backup the database automatically as your specified period.
- Default backup folder: Display where is the current database “bak” storing path.
- Specify backup folder : Click to modify the database storage file , you can it put to the location you want .

Data backup period: ☒ Daily ☐ Weekly ☐ Monthly ☐ Every quarter

Default backup folder: E:\patrol\_18.2\Patrol\Bak

Other backup folder:

**\*\* For data safety , please not put data backup in “C” disk.**